




The Moku:Lab Phasemeter tracks and measures phase (relative to a reference clock), frequency and amplitude of two independent input signals from 1 kHz to 200 MHz. Based on a digitally implemented phase-locked loop architecture, the Moku:Lab Phasemeter provides exceptional dynamic range, zero dead time and measurement precision that exceeds the performance of conventional lock-in amplifiers and frequency counters.

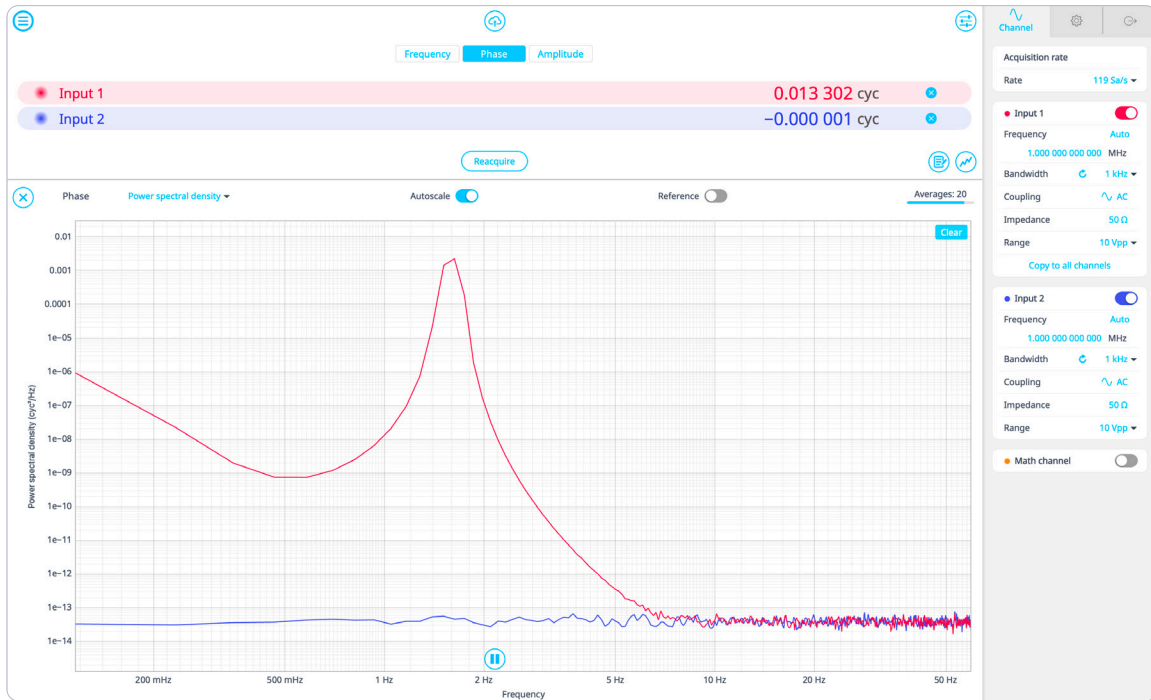

**Frequency Range**  
1 kHz to 200 MHz

**Tracking Bandwidth**  
Up to 100 kHz

**Phase error**  
0.9  $\mu$ rad/ $\sqrt{\text{Hz}}$  @ 10 Hz

**Data Logging rates**  
Up to 15.2 kSa/s

**Built-in Analysis**  
Allan Deviation

## Features

- Two independent phasemeter channels that track and record phase, frequency, and amplitude
- Phase-locked output option enables you to generate sine waves that are phase-locked to the inputs at the fundamental frequency or harmonics
- Output measured amplitude, phase, or frequency offset for closed-loop control systems, or stream to a computer using Moku APIs
- Real-time spectral analysis to display and save power spectral densities, Allan deviation, and more
- Phase-locked loop tracking bandwidths from 1 Hz to 100 kHz

## Specifications

- Input frequency range: 1 kHz to 200 MHz
- Input voltage range: 1 Vpp or 10 Vpp
- Tracking bandwidth: 1 Hz, 10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz
- Reference frequency resolution: 4  $\mu$ Hz
- Data logging rates: 30 Sa/s, 119 Sa/s, 477 Sa/s, 1.9 kSa/s, 15.2 kSa/s
- Sine wave generators: Dual-channel 250 MHz (manual or input-locked)
- Output frequency multiplier: 0.125x to 250x (phase-locked to input)
- Phase output wrap: off,  $\pm \pi$ ,  $\pm 2\pi$ ,  $\pm 4\pi$

## Applications

- Oscillator analysis
- Optical/ultrasound ranging
- Gravitational wave detection
- Interferometry
- Phase-locked loop