


1224A LaserSource Cable, TO-Can, Type A, 2 m



The 1224A LaserSource Cable is designed for use with the Micro 5.6 and Micro 9.0 LaserMounts and Type A TO-can lasers, where the laser anode is common with the photodiode cathode, as shown in the diagram below.

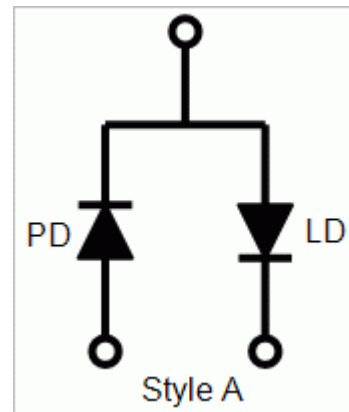

Specifications

Instrument connection	DB-9, male
Mount connection	TO-can socket, Type A pin-out
Signal connections	LD anode and cathode PD anode and cathode
Interlock	Shorted at instrument connector
Current rating (A)	3
Length (m)	2
Hood construction	Metal