



Dichroic Circular Polarizer

Circular polarizers transmit either left-circular polarized light or right-circular polarized light for an input beam of any polarization state. When circularly polarized light is reflected, its propagation direction reverses, changing left-circular polarization to right circular polarization and vice-versa. Therefore the same polarizer that produces circular polarization of the incident beam will block the return beam. Achievement of optical isolation using the circular polarizer requires that the reflection be specular and that no significant depolarization or polarization modification occur in any intervening medium between the reflector and optical isolator. We offer circular polarizers in two basic designs, each for use in air:


- Dichroic Polarizer / Zero-Order Retarder
- Beamsplitting Polarizer / Zero-Order Retarder

Meadowlark Optics Dichroic Circular Polarizers consist of a dichroic linear polarizer and true zero-order quarterwave retarder. Precisely aligning the retarder fast axis at 45° to the linear polarization direction ensures optimum performance.

True zero-order retarders are used in the assembly of our Dichroic Circular Polarizers and tight retardance tolerances contribute to the final performance. Once aligned, both polarizer and retarder materials are laminated between optically flat substrates, providing a peak-to-valley transmitted wavefront distortion of less than $\lambda/5$. Anti-reflection coated windows ensure surface reflection losses are minimized.

Achievement of the desired polarization effect requires proper orientation of your Dichroic Circular Polarizer; be sure to position the indicator marking in the direction of beam propagation. Our standard Dichroic Circular Polarizers are designed for single wavelength applications.

Dichroic Circular Polarizer Construction

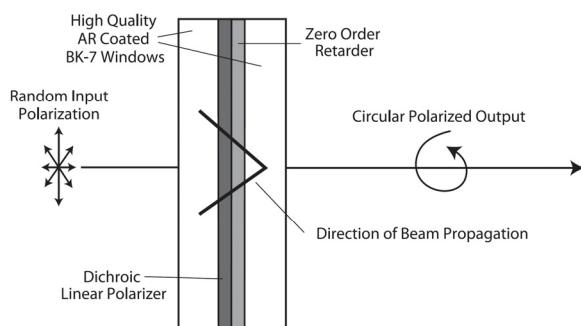

Key Features

- • •
- High isolation
- Large diameters available
- Low transmitted wavefront distortion

Polarization Suite

- • •
- Linear Polarizers**
 - Precision Linear Polarizer
 - High Contrast Linear Polarizer
 - Ultra-High Contrast Linear Polarizer
 - Glan-Thompson Polarizer
 - Ultra Broadband Polarizer
 - MWIR Polarizer
 - Deep Ultraviolet Polarizer

Beamsplitting Polarizers

- Wire Grid Versalight Polarizer
- Wire Grid Versalight Beam Splitter
- Laser Line Beamsplitting Polarizer
- Broadband Beamsplitting Polarizer
- Polarizing Bandpass Filter

Circular Polarizers

- Dichroic Circular Polarizer
- Beam Separator



SPECIFICATIONS

Standard Wavelengths	532, 632.8, 670, 780, 850, 1064, and 1550 nm
Substrate Material	N-BK7
Polarizer Material	Dichroic Polymer
Retarder Material	Birefringent Polymer
Transmitted Wavefront Distortion (P-V @ 632.8 nm)	
Visible	$\leq \lambda/5$
Near Infrared	$\leq \lambda/2$
Beam Deviation	
Visible	≤ 1 arc-min
Near Infrared	≤ 2 arc-min
Surface Quality	40 – 20 scratch-dig
Reflectance (per surface)	$\leq 0.5\%$
Isolation	> 99.8%
Storage Temperature	-20°C to +50°C
Operating Temperature	-20°C to +50°C
Laser Damage Threshold	1 W/cm ² , CW

Prolonged exposure to strong ultraviolet radiation may damage these polarizers.

ORDERING INFORMATION

Mounted			
<i>Clear Aperture in. (mm)</i>	<i>Thickness in. (mm)</i>	<i>Diameter ± 0.005 in. (± 0.13 mm)</i>	<i>Part Number</i>
0.40 (10.2 mm)	0.25 (6.35 mm)	Ø1.00 (Ø25.4 mm)	CPM – 050 – λ
0.70 (17.8 mm)	0.35 (8.9 mm)	Ø1.00 (Ø25.4 mm)	CPM – 100 – λ
1.20 (30.5 mm)	0.50 (12.7 mm)	Ø2.00 (Ø50.8 mm)	CPM – 200 – λ
Unmounted			
<i>Clear Aperture in. (mm)</i>	<i>Thickness in. (mm)</i>	<i>Diameter +0/-0.010 in. (+0/-0.25 mm)</i>	<i>Part Number</i>
0.40 (10.2 mm)	0.13 (3.3 mm)	Ø0.50 (Ø12.7 mm)	CP – 050 – λ
0.80 (20.3 mm)	0.26 (6.6 mm)	Ø1.00 (Ø25.4 mm)	CP – 100 – λ

Meadowlark Optics standard Dichroic Circular Polarizers provide left-hand circular output.

Please call to request a quote for right-hand output.

Append a "-RH" to your part number for right hand circular output.