

M i r r o r s



Mirrors Selection Guide

B009

Super Mirror



Super Mirrors
TFHSM

B010

Femtosecond Laser



Low Dispersion Mirrors for Femtosecond Laser
Low Dispersion Mirrors for High Power Femtosecond Laser
FLM/FLMHP

B011



Negative Dispersion Mirrors
for Femtosecond Laser
GFM/GCM

B013

Frameless Mirror Unit



Frameless Mirror Unit
GMMUHP

B014



Frameless Beamsplitter Unit
GBSMU

B014

Surface Accuracy Guaranteed Mirror



Surface Accuracy Guaranteed Mirror
HTFM

B016



Holder Attached
Surface Accuracy Guaranteed Mirrors
HTFM-MHG

B018

High Power



Dielectric Mirrors
for High Power Laser
TFMHP

B020


Ultra Broadband



Ultra Broadband Dielectric Mirrors
TFMS


B022

Dielectric Multi-layer Coating



Laser Line Mirrors
TFM

B024



0-45° Wide Angle Dielectric Mirrors
TFVM


B027

Aluminum Coating



Aluminum Mirrors
TFA/TFAN/TFAQ/TFAQN/TFAE
OPBA/OPSQA

B030



Large Aluminum Mirrors
TFAEFL

B034




Reasonable Aluminum Flat Mirrors
S-TFA

B035



Ellipsoidal Mirror
TCEA

B036



Paraboloid Mirror
TCPA

B037

Gold Coating



Gold Flat Mirrors
TFG/TFGS

B038



Silver Mirrors
TFAG

B040

Contact sheet for Special Order for Mirror **B041**


Contact sheet for laser cavity mirror **B042**

Mirrors Selection Guide




Mirrors designed for the optical laboratory are produced by metal or dielectric coating on the polished glass surface by vacuum deposition.

Optical characteristics of reflectance with a variety of features are provided with the coating. Please select a mirror with the correct optical properties that matches your specifications.

Performance Comparison of a typical reflectivity from mirror coatings

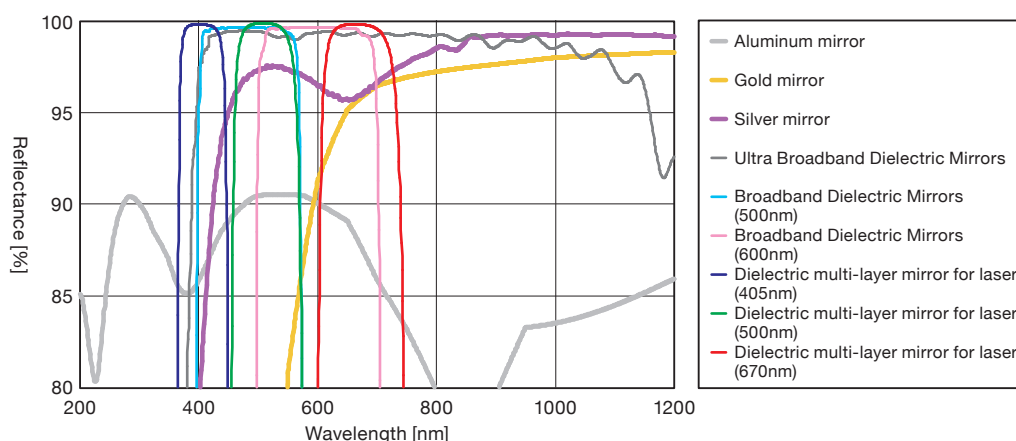

Features of the Mirrors

Type of Coat	Affected products		Features	How to Use
Metallic coating	Aluminum (TFA) Reference B030		Truly affordable ! Good reflectance in a wide range of wavelength. Mirrors are available in gold (AU) coating and at any angle of incidence. Light absorption coating, reflection is slightly reduced.	It is designed for any simple optical system Works well with low power lasers. Together with imaging optics that uses white light illumination system. Also highly compatible when used together with infra-red optics. (Gold mirrors)
	Gold (TFG/TFGS) Reference B038			
	Silver (TFAG) Reference B040			
Broadband dielectric multi-layer	Ultra Broadband (TFMS) Reference B022		High reflectance with low loss. Zero absorption from the coatings with high laser strength. It is resistant to hard scratches. Designed and manufactured for narrow wavelength range. To be used at 45 degrees angle of incidence	Designed for the following: Precision optical systems especially for low light and low loss optical systems. Sub-watt class laser systems. Multi-wavelength laser optical systems.
	Broadband (TFVM) Reference B027			
Dielectric multi-layer coating	For Laser (TFM) Reference B024 High Power (TFMHP) Reference B020		High reflectance with low loss. Zero absorption from the coatings with high laser strength. It is resistant to hard scratches. Designed and manufactured for narrow wavelength range. To be used at 45 degrees angle of incidence	For all general and high power laser systems (TFMHP)

Mirrors with a dielectric multi-layer coating can have a variety of features in addition to the characteristics of reflectance.

Super Mirrors (TFSM) Reference B010		It is a mirror which had low-scattering loss and high reflectivity of 99.999%.
Mirrors for femtosecond laser Low dispersion mirrors for femtosecond laser (FLM/FLMHP) Reference B011 Negative dispersion mirrors for femtosecond laser (GFM/GCM) Reference B013		For a femtosecond laser, it uses a mirror with the combined characteristics of a dielectric multi-layer coating, wide range, low dispersion and high strength for high power lasers.
Dielectric Mirrors for high power laser (TFMHP) Reference B020		With our propriety engineering process of the multi-layer coating, it is designed to work well with high-energy laser pulse.

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating


Gold Coating

The Fabry-Perot type resonator cavity is often used for measuring extremely high accuracy time or distance with use of the light. Super mirror is a ultra-high performance mirror that surface reflectance is close to 1 (100%) as much as possible in order to increase the performance of the resonator.

- By using an ion beam sputtering (IBS), high quality and dense coating with few defects has been coated.
- With a special polishing technique, the low-scattering substrate of surface flatness $Ra < 0.1\text{nm}$ is used.
- The mirror coating with reflectivity of 99.999% is achieved from the coating design technology that had been developed for many years.
- Scattering loss due to the substrate and the coating is very small, when it is incorporated into a cavity, it is to be expected a high finesse and very narrow spectral bandwidth.
- It is provided two types of wavelength 532nm and 1064nm.




Schematic

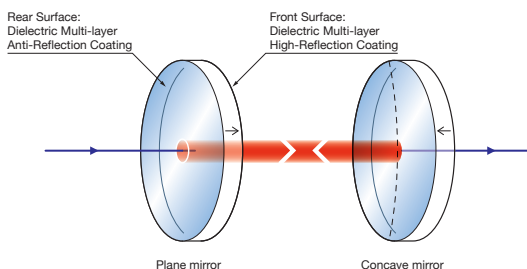

Outline Drawing

(in mm)



- Tolerance
Diameter $\phi D_{-0.1}^0$
Thickness $t \pm 0.1$

Specifications

Part Number	Wavelength Range [nm]	Diameter ϕD [mm]	Thickness t [mm]	Reflectance*1 [%]	Loss*2 [ppm]
TFHSM-12.7C06-532	532	$\phi 12.7$	6	99.995	20
TFHSM-25C06-532	532	$\phi 25$	6	99.995	20
TFHSM-25.4C06-532	532	$\phi 25.4$	6	99.995	20
TFHSM-30C06-532	532	$\phi 30$	6	99.995	20
TFHSM-50C08-532	532	$\phi 50$	8	99.995	20
TFHSM-12.7C06-1064	1064	$\phi 12.7$	6	99.999	8
TFHSM-25C06-1064	1064	$\phi 25$	6	99.999	8
TFHSM-25.4C06-1064	1064	$\phi 25.4$	6	99.999	8
TFHSM-30C06-1064	1064	$\phi 30$	6	99.999	8
TFHSM-50C08-1064	1064	$\phi 50$	8	99.999	8

*1 The above is the reflectance measured in the CRD method. However, there may vary depending on measurement conditions and measurement method.

*2 The values indicated in "Loss" is only reference data. These data will not be attached with the product.

Specifications

Material	Synthetic Fused Silica
Coating	Front Surface: Dielectric Multi-layer High-Reflection Coating Rear Surface: Dielectric Multi-layer Anti-Reflection Coating
Incident Angle	0°
Surface flatness of substrate	$\lambda/10$
Parallelism	$< 5''$
Surface Quality (Scratch-Dig)	10-5
Clear Aperture	80% of Actual Aperture
Reflectance of Rear Surface	$< 0.15\%$
Substrate Type	Optical Flat

Guide

- ▶ The super mirror coated on a concave substrate is available as custom. Please specify the radius of curvature.
- ▶ For products with different wavelengths, sizes, and incident angles not listed on-line or in our catalog, contact our Sales Division with your request.


Attention

- ▶ When used as a single mirror, it does not transmit the light because the reflectance is high. Please use it after assembled to precise cavity in order to use transmitted light.
- ▶ Please make a measurement or handling of the mirror in the clean environment. The dirt, dust and gas contamination will cause a significant effect on the measured value.
- ▶ If a cavity is consisted of two plane mirrors, the output light may become unstable. In order to realize the stable cavity, please change the mirror of one side or both into a concave mirror, and build a cavity.
- ▶ The Super Mirror has an extremely long lead time manufacture and test resulting in longer delivery than simple products on-line and in our general catalog. Please consult our Sales Team in advance when ordering.


Typical Reflectance Data

R: Reflectance

TFHSM-532

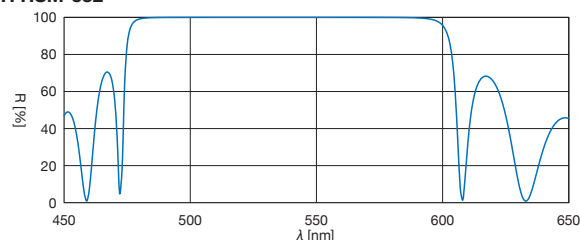


TFHSM-1064

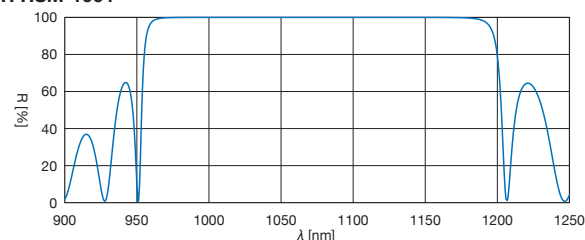


This mirror is designed to provide low wavelength dispersion suitable for use with ultra-short pulse lasers with 100 femtosecond or less.

- We have designed a special thin film coating that optimizes wavelength dispersion, range and the strength of lasers.
- It has the effect of suppressing the spread of the pulse width produced by a plurality of reflecting mirrors.
- There are three types available, FLM1 standard, FLM2 wide wavelength band, and FLMHP for high power femtosecond laser*.
- These mirrors are designed and produced for usage within the microscopy with femtosecond laser and optical systems with femtosecond time-resolved spectroscopy.

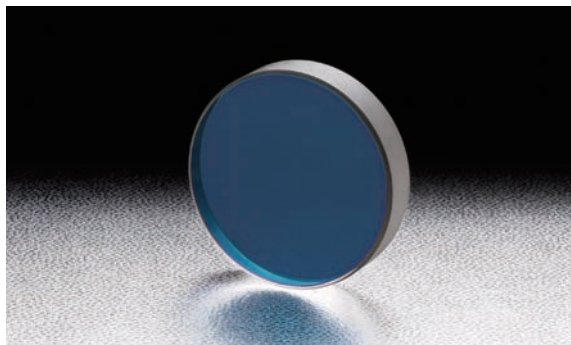


Schematic

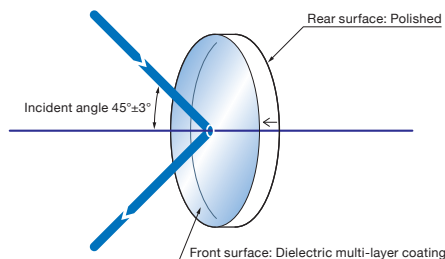

Outline Drawing

(in mm)



- Tolerance
Diameter $\phi D_{\pm 0.1}$
Thickness $t \pm 0.1$

Specifications

Material	BK7 (FLM) Synthetic fused silica (FLMHP)
Coating	Dielectric multi-layer coating
Incident angle	$45^\circ \pm 3^\circ$
Surface Flatness	$\lambda/10$
Parallelism	$<5''$
Surface Quality (Scratch-Dig)	10-5
Clear aperture	80% of Actual Aperture
Rear Surface	Polished

Guide

- ▶ These low dispersion wavelength mirrors are available in physical dimensions other than those found in the catalog, please contact our Sales Division for Custom products.
- ▶ We can also provide high power negative dispersion mirror.
- ▶ Also available are our surface flatness guarantee (HTFM) mirrors with accuracy guarantee after surface coating. [Reference](#) B016

Attention

- ▶ When used in angles other than 45 degrees (AOI), we would not be able to guarantee the wavelength dispersion.

Low Dispersion Mirrors for Femtosecond Laser

Part Number	Wavelength Range		Diameter ϕD [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]
	S polarization [nm]	P polarization [nm]				
FLM1-12.7C05-800	720 – 900	760 – 840	$\phi 12.7$	5	>99.8	1
FLM1-25.4C05-800	720 – 900	760 – 840	$\phi 25.4$	5	>99.8	1
FLM1-30C05-800	720 – 900	760 – 840	$\phi 30$	5	>99.8	1
FLM2-12.7C05-800	700 – 940	740 – 860	$\phi 12.7$	5	>99.8	0.5
FLM2-25.4C05-800	700 – 940	740 – 860	$\phi 25.4$	5	>99.8	0.5
FLM2-30C05-800	700 – 940	740 – 860	$\phi 30$	5	>99.8	0.5

* Laser pulse width 50fs, wavelength 800nm

Low Dispersion Mirrors for High Power Femtosecond Laser

Part Number	Wavelength Range		Diameter ϕD [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]
	S polarization [nm]	P polarization [nm]				
FLMHP-12.7C05-800	745 – 855	775 – 825	$\phi 12.7$	5	>99	2
FLMHP-25.4C05-800	745 – 855	775 – 825	$\phi 25.4$	5	>99	2
FLMHP-30C05-800	745 – 855	775 – 825	$\phi 30$	5	>99	2

* Laser pulse width 65fs, wavelength 800nm

Compatible Optic Mounts

MHG-MP12.7-NL / MHG-MP25-NL, HS25-NL / MHG-MP30-NL, HS30-NL

Application
SystemsOptics &
Optical
CoatingsOpto-
Mechanics

Bases

Manual
StagesActuators &
AdjustersMotorized
StagesLight Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Low Dispersion Mirrors for Femtosecond Laser

FLM/FLMHP

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating


Aluminum Coating

Gold Coating


Typical Reflectance Data

R: Reflectance

FLM1

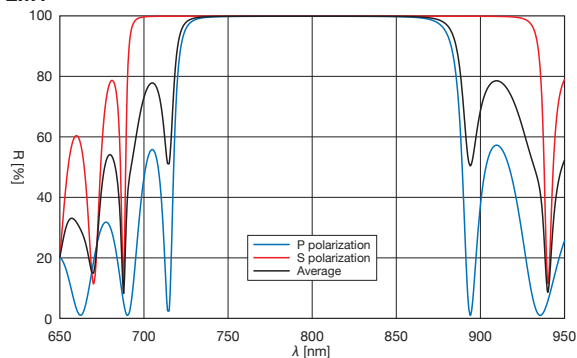


FLM2

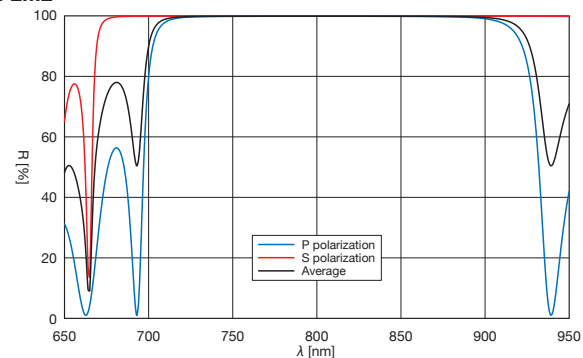


Group Delay Data (for reference only)

GDD: Group Delay Dispersion

FLM1

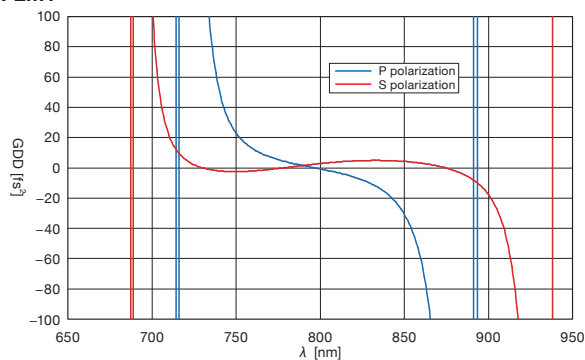


FLM2

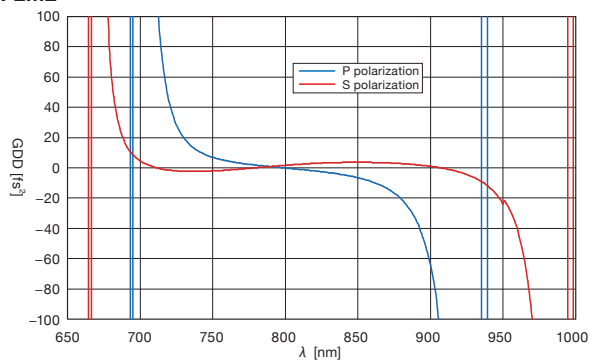

Typical Reflectance Data


R: Reflectance

FLMHP

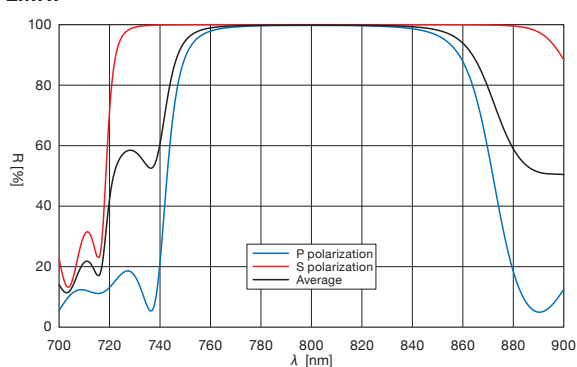


This mirror has a negative dispersion and can be used for pulse compression in a femtosecond laser system.

- These mirrors are more compact and exhibit a smaller optical loss than the conventional prisms used for pulse compression.
- Center wavelength is for Ti: Sapphire at 800nm.
- Plano and concave substrates designed for cavities are available.

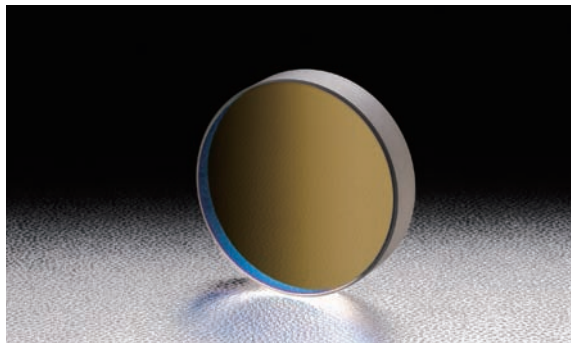


Outline Drawing

(in mm)



- Tolerance
Diameter $\phi D_{\pm 0.1}$
Thickness $t_{c \pm 0.1}$



- Tolerance
Diameter $\phi D_{\pm 0.1}$
Thickness $t_{c \pm 0.2}$

Specifications

Material	BK7
Coating	Dielectric multi-layer coating
Incident angle	0° – 20°
Surface Flatness	$\lambda/10$
Parallelism	<5" (flat surface)
Surface Quality (Scratch-Dig)	10-5
Clear aperture	80% of Actual Aperture
Rear Surface	Polished


Guide

- ▶ Fabrication of negative dispersion mirror is also available.
- ▶ We can also provide high power negative dispersion mirror.
- ▶ Also available are our surface flatness guarantee (HTFM) mirrors with accuracy guarantee after surface coating. [Reference](#) B016

Attention

- ▶ The angle of incident for this series is 0 to 20 degrees and the laser dispersion may not be corrected for other angles. Please contact our Sales Division for further details.

Schematic

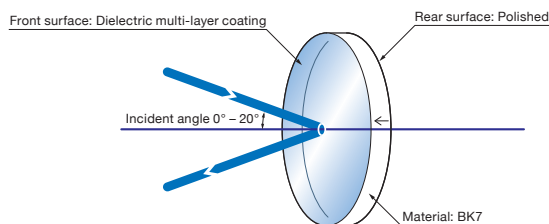

Negative Dispersion Mirrors for Femtosecond Laser (Plano)

Part Number	Wavelength Range [nm]	Diameter ϕD [mm]	Thickness t_c [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]
GFM-12.7C05-800	700 – 900	$\phi 12.7$	5	>99.8	0.5
GFM-25.4C05-800	700 – 900	$\phi 25.4$	5	>99.8	0.5
GFM-30C05-800	700 – 900	$\phi 30$	5	>99.8	0.5

* Laser pulse width 50fs, wavelength 800nm

Negative Dispersion Mirrors for Femtosecond Laser (Concave)

Part Number	Wavelength Range [nm]	Diameter ϕD [mm]	Edge Thickness t_e [mm]	Radius of curvature r [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]
GCM-30C07-50-800	700 – 900	$\phi 30$	7	50	>99.8	0.5
GCM-30C07-100-800	700 – 900	$\phi 30$	7	100	>99.8	0.5
GCM-30C05-500-800	700 – 900	$\phi 30$	5	500	>99.8	0.5
GCM-30C05-1000-800	700 – 900	$\phi 30$	5	1000	>99.8	0.5


* Laser pulse width 50fs, wavelength 800nm

Typical Reflectance Data

GFM/GCM

R: Reflectance


Incident angle 0°

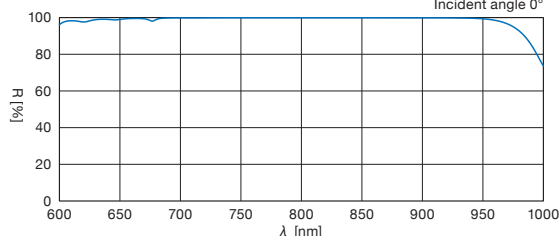

Incident angle Group Velocity Delay Data (for reference only)

GFM/GCM

Incident angle 0°

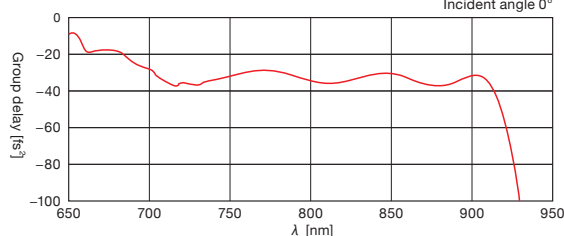

Frameless Mirror Unit

Frameless Beamsplitter Unit


GMMUHP
GBSMU

RoHS
RoHS

Frameless mounting is designed to minimize product footprint and maximize the front surface area of the mirror used.

Our high-reflectivity mirrors are produced using a ceramic material with thermal expansion ratio equivalent to Zerodur® to provide maximum thermal stability.

- Laser damage threshold of the mirror is equivalent to our high power dielectric laser mirrors (TFMHP).
- $\lambda/10$ surface accuracy guarantee after coating.
- The Beamsplitter coating is equivalent to our ultra broadband dielectric half mirror (PSMH).
- Fused Silica is used for our beamsplitters to minimize transmitted wavefront error(s).

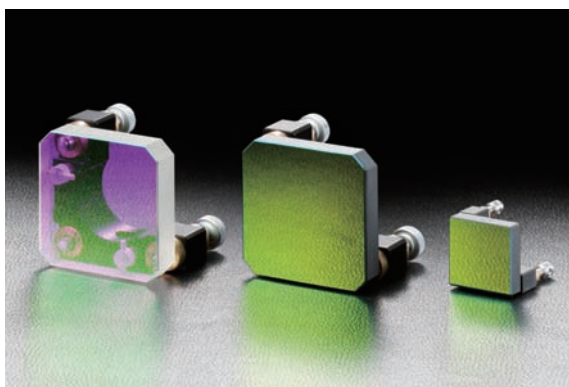

Specifications

Holder

Type		GMMUHP-24.4	GMMUHP-49 GBSMU-49
Adjustable axis		3 axis	2 axis
Adjustment Range [°]	Elevation	±3	±2
	Rotation	±3	±2
Resolution [°/rotation]	Elevation	0.74	0.26
	Rotation	0.74	0.26
Main material		Brass	Aluminum
Surface finishing		Super black chrome	Black anodized
Weight [kg]		0.04	0.16

Mirror

Type	Mirror	Beamsplitter
Material	Ceramic	Synthetic fused silica
Incident angle	45°±3°	
Surface flatness after coating	Reflective wavefront $\lambda/10$	
Surface Quality (Scratch-Dig)	20-10	
Reflectance	>99%	Average 50±5%


Guide

- ▶ These mirrors are mounted to the base in the same method as using the mirror holder MHG. [WEB Reference](#) [Catalog Code](#) W4001
- ▶ Able to mount on Pedestal Bases(PST-**) [WEB Reference](#) [Catalog Code](#) W6039 and Post(RO-**) with M6 thread (sold separately) [WEB Reference](#) [Catalog Code](#) W6052

Attention

- ▶ Surface accuracy data is not provided standard with the product. Please contact our Sales Division for this data at an additional charge.
- ▶ The reflectance specifications are represented by the average of the reflectance of P polarized light and S polarized light.
- ▶ If the product is used without setting the angle of incidence to 45 degrees, the reflection may decrease.
- ▶ Be sure to wear laser safety goggles when checking optical path and adjusting optical axis.

Schematic

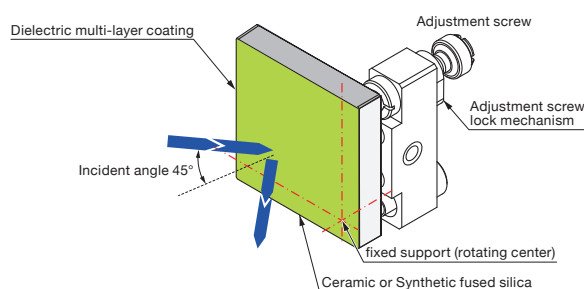

Catalog Code W3001

Mirror Unit

Part Number	Wavelength Range [nm]	Dimension of front plate [mm]	Coating clear aperture [mm]	Surface flatness after coating [mm]	Laser Damage Threshold* [J/cm²]
GMMUHP-24.4-355	355	24.4×24.4×7	23×23	φ20	8
GMMUHP-24.4-532	532	24.4×24.4×7	23×23	φ20	26.5
GMMUHP-24.4-1064	1064	24.4×24.4×7	23×23	φ20	28
GMMUHP-49-355	355	49×49×8.5	48×48	φ30	8
GMMUHP-49-532	532	49×49×8.5	48×48	φ30	26.5
GMMUHP-49-1064	1064	49×49×8.5	48×48	φ30	28

* Laser pulse width 10ns, repetition frequency 20Hz

Catalog Code W3406

Beamsplitter Unit

Part Number	Wavelength Range [nm]	Dimension of front plate [mm]	Coating clear aperture [mm]	Surface accuracy after coating [mm]	Clear aperture of transmitted beam [mm]	Laser Damage Threshold* [J/cm²]
GBSMU-49-VIS	400 - 700	49×49×12	48×48	φ30	φ20	2.1

* Laser pulse width 10ns, repetition frequency 20Hz

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating


Aluminum Coating

Gold Coating


Outline Drawing

(in mm)

GMMUHP-24.4

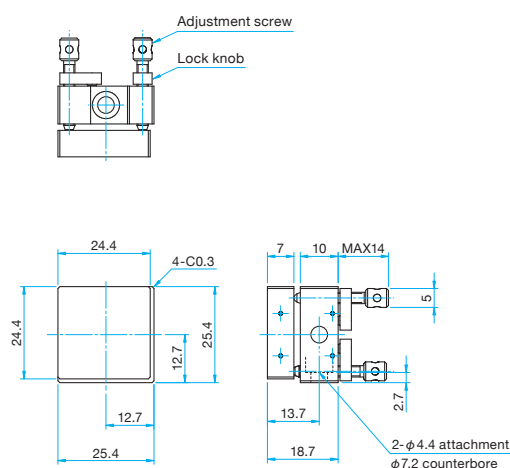


GMMUHP-49/GBSMU-49

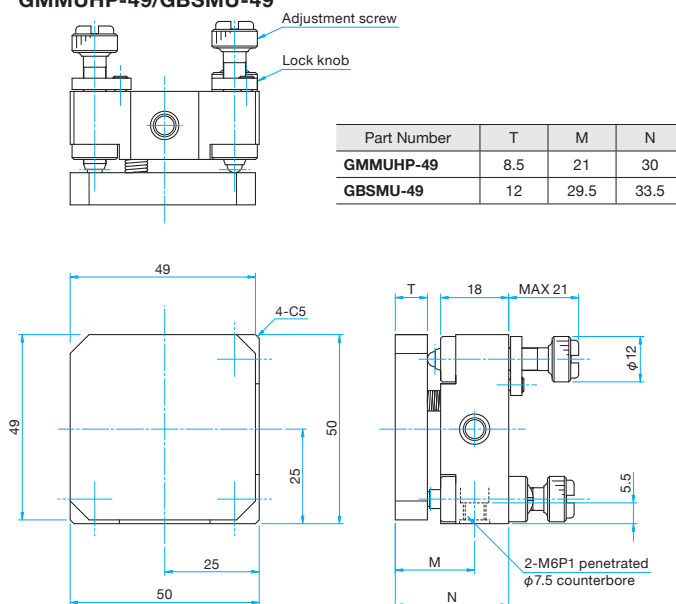


Typical Reflectance Data of Frameless Mirror

R: Reflectance


GMMUHP-355

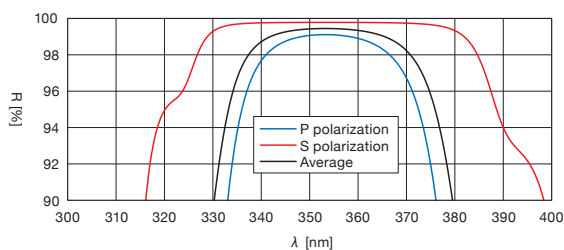

GMMUHP-532

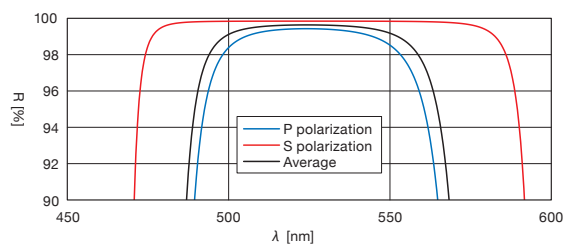


GMMUHP-1064

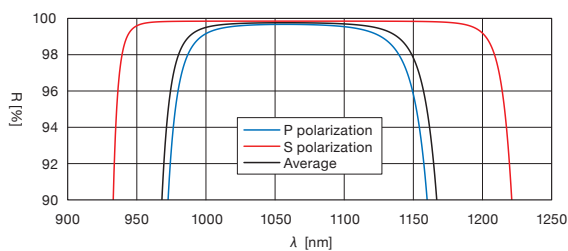


Typical Transmittance Data of Frameless Beamsplitter

T: Transmission

GBSMU-VIS

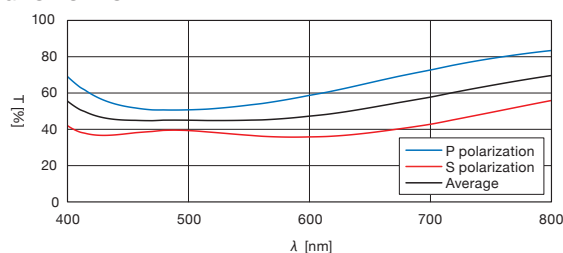

Surface Accuracy Data (reference data)



- Surface accuracy measurement method:
Measured with Zygo laser interferometer
- Surface accuracy measurement wavelength
632.8nm
- Surface accuracy guaranteed temperature
23°C±2°C

Application
Systems

Optics &
Optical
Coatings

Opto-
Mechanics

Bases

Manual
Stages

Actuators &
Adjusters

MotORIZED
Stages

Light Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating


Surface Accuracy Guaranteed Mirror

HTFM


RoHS

High Surface Accuracy Mirrors are realized by optimizing the conditions of the substrate material, thickness and coating. A surface accuracy of $\lambda/10$ after coating is guaranteed on these mirrors.

- This product features a surface accuracy (after coating) higher than our standard dielectric multi-layer flat mirrors (TFM).
- By using synthetic fused silica and increasing the substrate thickness the rigidity of the mirrors are increased.
- Our product line includes mirrors with high-reflection for use in individual wavelengths including ultra-violet, YAG and other lasers.

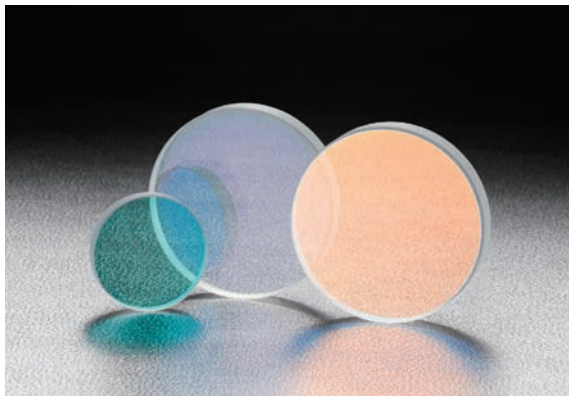


Schematic

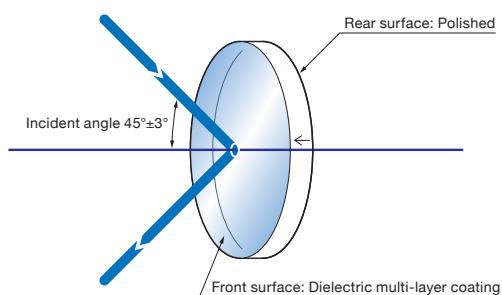

Outline Drawing

(in mm)

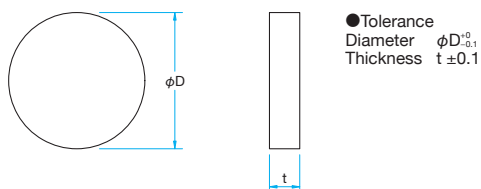

Specifications

Material	Synthetic fused silica
Coating	Dielectric multi-layer coating
Incident angle	45°±3°
Surface Flatness after coating	$\lambda/10$
Parallelism	<3'
Surface Quality (Scratch-Dig)	10-5
Clear aperture	80% of external diameter
Rear Surface	Polished


Guide

- ▶ These mirrors are available mounted in a holder with surface accuracy guaranteed (HTFM-MHG), contact our Sales Division to assist in your selection. [Reference > B018](#)
- ▶ Please contact our Sales Division for customized products. (customized on outer diameter, wavelength characteristic, etc.) Please use the inquiry sheet. (Reference > B041). [Reference > B041](#)

Attention

- ▶ Surface accuracy data is not provided standard with the product. Please contact our Sales Division for this data at an additional charge.
- ▶ For the dielectric multi-layer film, the reflection rate wavelength characteristics vary depending on the polarization state of the incident beam. The reflection rate of P polarization is lower than that of S polarization and the reflection band is narrow.
- ▶ The reflectance specifications are represented by the average of the reflectance of P polarized light and S polarized light.
- ▶ If the product is used without setting the angle of incidence to 45 degrees, the reflection may decrease.
- ▶ If the product is not used at an applicable wavelength, the reflection rate may decrease.

Surface Accuracy Data (reference data)



- Surface accuracy measurement method: Measured with Zygo laser interferometer
- Surface accuracy measurement wavelength: 632.8nm
- Surface accuracy guaranteed temperature: 23°C±2°C

248 – 308nm

Part Number	Wavelength Range [nm]	Diameter φD [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm²]
HTFM-12.7C08-248	248	φ12.7	8	>99.2	2
HTFM-25.4C08-248	248	φ25.4	8	>99.2	2
HTFM-30C08-248	248	φ30	8	>99.2	2
HTFM-50C11-248	248	φ50	11	>99.2	2
HTFM-50.8C11-248	248	φ50.8	11	>99.2	2
HTFM-12.7C08-266	266	φ12.7	8	>99.2	2
HTFM-25.4C08-266	266	φ25.4	8	>99.2	2
HTFM-30C08-266	266	φ30	8	>99.2	2
HTFM-50C11-266	266	φ50	11	>99.2	2
HTFM-50.8C11-266	266	φ50.8	11	>99.2	2
HTFM-12.7C08-308	308	φ12.7	8	>99.5	2
HTFM-25.4C08-308	308	φ25.4	8	>99.5	2
HTFM-30C08-308	308	φ30	8	>99.5	2
HTFM-50C11-308	308	φ50	11	>99.5	2
HTFM-50.8C11-308	308	φ50.8	11	>99.5	2

* Laser pulse width 10ns, repetition frequency 20Hz

Compatible Optic Mounts

MHG-MP12.7-NL / MHG-MP25-NL, HS25-NL / MHG-MP30-NL, HS30-NL / MHG-MP50-NL / MHG-MP50.8-NL

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

355 – 1064nm


Part Number	Wavelength Range [nm]	Diameter ϕ D [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]
HTFM-12.7C08-355	355	ϕ 12.7	8	>99.5	5
HTFM-25.4C08-355	355	ϕ 25.4	8	>99.5	5
HTFM-30C08-355	355	ϕ 30	8	>99.5	5
HTFM-50C11-355	355	ϕ 50	11	>99.5	5
HTFM-50.8C11-355	355	ϕ 50.8	11	>99.5	5
HTFM-12.7C08-532	532	ϕ 12.7	8	>99.5	7
HTFM-25.4C08-532	532	ϕ 25.4	8	>99.5	7
HTFM-30C08-532	532	ϕ 30	8	>99.5	7
HTFM-50C11-532	532	ϕ 50	11	>99.5	7
HTFM-50.8C11-532	532	ϕ 50.8	11	>99.5	7
HTFM-12.7C08-1064	1064	ϕ 12.7	8	>99.5	20
HTFM-25.4C08-1064	1064	ϕ 25.4	8	>99.5	20
HTFM-30C08-1064	1064	ϕ 30	8	>99.5	20
HTFM-50C11-1064	1064	ϕ 50	11	>99.5	20
HTFM-50.8C11-1064	1064	ϕ 50.8	11	>99.5	20

* Laser pulse width 10ns, repetition frequency 20Hz


Typical Reflectance Data

R: Reflectance


HTFM-248

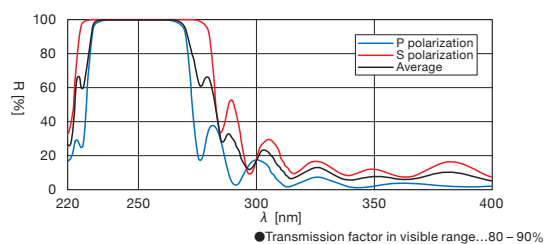


HTFM-266

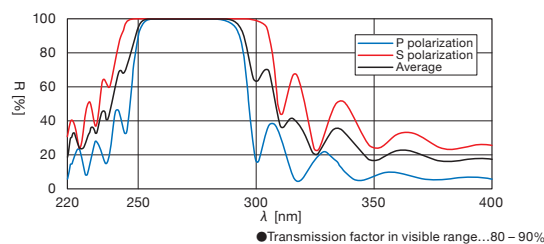


HTFM-308

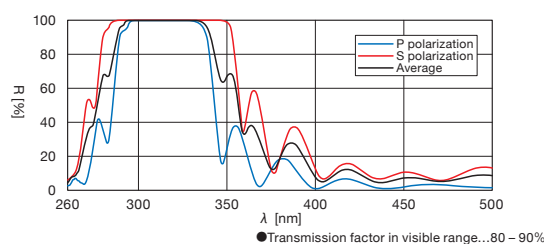


HTFM-355

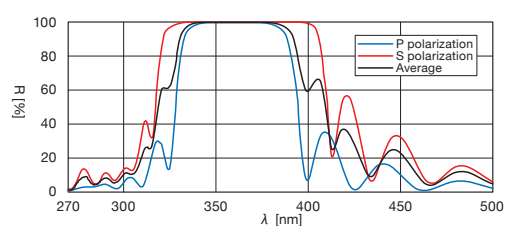

HTFM-532

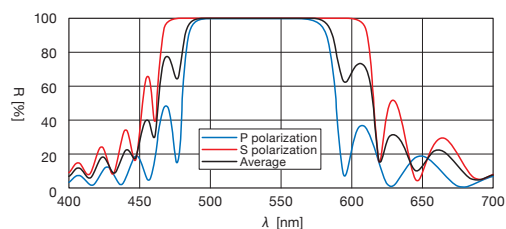

HTFM-1064

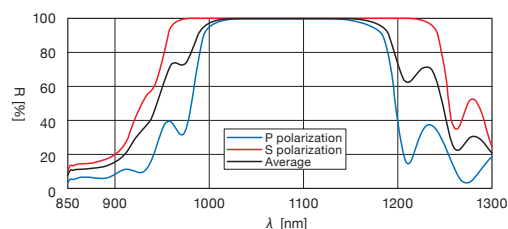

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Holder Attached Surface Accuracy Guaranteed Mirrors

HTFM-MHG

RoHS

By bonding the coated surface to our Kinematic Mirror Holders, a $\lambda/10$ surface flatness is guaranteed!

This product is suitable for high accuracy wavefront optical systems and interferometer requirements.

- 2 types of performance mirror holders are offered: high stability mirror holder (MHG-HS) or production model (MHG-MP).



Specifications

Holder

Movable axis	HTFM-MHG-HS: 3 axes HTFM-MHG-MP: 2 axes (HTFM-12.7C08-MHG-MP: 3axes)
Main Material	Aluminum (Brass: MHG-MP12.7 only)
Finishing	Black anodized (Only MHG-MP12.7 is Super black chrome)

Mirror

Material	Synthetic fused silica
Coating	Dielectric multi-layer coating
Incident angle	$45^\circ \pm 3^\circ$
Surface Flatness	After holder is attached $\lambda/10$
Surface Quality (Scratch-Dig)	10-5
Clear aperture	80% of Actual Aperture
Rear Surface	Polished


Guide

- ▶ The Production model (MHG-MP) is equipped with locking mechanisms on the adjustment screw.
- ▶ This product can be attached to a rod (RO-**-**): separately available [WEB Reference](#) [Catalog Code](#) W6052 or a post stand (PS-**-**): separately available). [WEB Reference](#) [Catalog Code](#) W6039
- ▶ The mirror reflection wavelength characteristic are noted with the graph of the surface accuracy guaranteed mirror (HTFM).
[Reference](#) B017

Attention

- ▶ The mirror surface will protrude by 2mm beyond the front surface of the holder after attachment.
- ▶ Surface flatness data is not provided standard with the product. Please contact our Sales Division for this data at an additional charge.
- ▶ Surface flatness will not be guaranteed when the mirror is detached.
- ▶ Any impacted shock to the holder or mirror may result in poor surface flatness.
- ▶ For production model (MHG-MP), the rotation center is at the external side of the mirror (support point of the holder)
- ▶ When fixing the high stability model (MHG-HS) to a flat surface, please use supplied plate for attaching posts.
- ▶ The optical axis will be 10mm higher after attaching the supplied plates.

Schematic

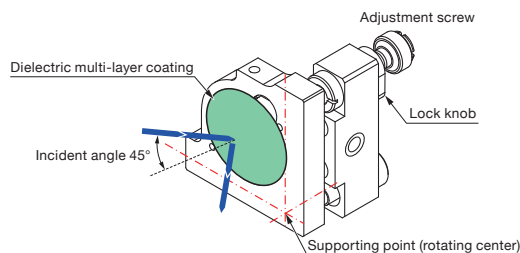

248 – 308nm

Part Number	Wavelength Range [nm]	Compatible Optics Diameter ϕD [mm]	Reflectance [%]	Holder part number	Adjustment Range		Resolution		Weight [kg]
					Elevation [°]	Rotation [°]	Elevation [°/rotation]	Rotation [°/rotation]	
HTFM-12.7C08-248-MHG-MP	248	$\phi 12.7$	>99.2	MHG-MP12.7	± 3	± 3	about 0.74	about 0.74	0.04
HTFM-25.4C08-248-MHG-MP	248	$\phi 25.4$	>99.2	MHG-MP25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-25.4C08-248-MHG-HS	248	$\phi 25.4$	>99.2	MHG-HS25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-248-MHG-MP	248	$\phi 30$	>99.2	MHG-MP30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-248-MHG-HS	248	$\phi 30$	>99.2	MHG-HS30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-50C11-248-MHG-MP	248	$\phi 50$	>99.2	MHG-MP50	± 2	± 2	about 0.26	about 0.26	0.24
HTFM-50.8C11-248-MHG-MP	248	$\phi 50.8$	>99.2	MHG-MP50.8	± 2	± 2	about 0.26	about 0.26	0.24
HTFM-12.7C08-266-MHG-MP	266	$\phi 12.7$	>99.2	MHG-MP12.7	± 3	± 3	about 0.74	about 0.74	0.04
HTFM-25.4C08-266-MHG-MP	266	$\phi 25.4$	>99.2	MHG-MP25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-25.4C08-266-MHG-HS	266	$\phi 25.4$	>99.2	MHG-HS25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-266-MHG-MP	266	$\phi 30$	>99.2	MHG-MP30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-266-MHG-HS	266	$\phi 30$	>99.2	MHG-HS30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-50C11-266-MHG-MP	266	$\phi 50$	>99.2	MHG-MP50	± 2	± 2	about 0.26	about 0.26	0.24
HTFM-50.8C11-266-MHG-MP	266	$\phi 50.8$	>99.2	MHG-MP50.8	± 2	± 2	about 0.26	about 0.26	0.24
HTFM-12.7C08-308-MHG-MP	308	$\phi 12.7$	>99.5	MHG-MP12.7	± 3	± 3	about 0.74	about 0.74	0.04
HTFM-25.4C08-308-MHG-MP	308	$\phi 25.4$	>99.5	MHG-MP25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-25.4C08-308-MHG-HS	308	$\phi 25.4$	>99.5	MHG-HS25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-308-MHG-MP	308	$\phi 30$	>99.5	MHG-MP30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-308-MHG-HS	308	$\phi 30$	>99.5	MHG-HS30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-50C11-308-MHG-MP	308	$\phi 50$	>99.5	MHG-MP50	± 2	± 2	about 0.26	about 0.26	0.24
HTFM-50.8C11-308-MHG-MP	308	$\phi 50.8$	>99.5	MHG-MP50.8	± 2	± 2	about 0.26	about 0.26	0.24

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

355 – 1064nm


Part Number	Wavelength Range [nm]	Compatible Optics Diameter ϕD [mm]	Reflectance [%]	Holder part number	Adjustment Range		Resolution		Weight [kg]
					Elevation [°]	Rotation [°]	Elevation [°/rotation]	Rotation [°/rotation]	
HTFM-12.7C08-355-MHG-MP	355	$\phi 12.7$	>99.5	MHG-MP12.7	± 3	± 3	about 0.74	about 0.74	0.04
HTFM-25.4C08-355-MHG-MP	355	$\phi 25.4$	>99.5	MHG-MP25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-25.4C08-355-MHG-HS	355	$\phi 25.4$	>99.5	MHG-HS25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-355-MHG-MP	355	$\phi 30$	>99.5	MHG-MP30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-355-MHG-HS	355	$\phi 30$	>99.5	MHG-HS30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-50C11-355-MHG-MP	355	$\phi 50$	>99.5	MHG-MP50	± 2	± 2	about 0.26	about 0.26	0.24
HTFM-50.8C11-355-MHG-MP	355	$\phi 50.8$	>99.5	MHG-MP50.8	± 2	± 2	about 0.26	about 0.26	0.24
HTFM-12.7C08-532-MHG-MP	532	$\phi 12.7$	>99.5	MHG-MP12.7	± 3	± 3	about 0.74	about 0.74	0.04
HTFM-25.4C08-532-MHG-MP	532	$\phi 25.4$	>99.5	MHG-MP25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-25.4C08-532-MHG-HS	532	$\phi 25.4$	>99.5	MHG-HS25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-532-MHG-MP	532	$\phi 30$	>99.5	MHG-MP30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-532-MHG-HS	532	$\phi 30$	>99.5	MHG-HS30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-50C11-532-MHG-MP	532	$\phi 50$	>99.5	MHG-MP50	± 2	± 2	about 0.26	about 0.26	0.24
HTFM-50.8C11-532-MHG-MP	532	$\phi 50.8$	>99.5	MHG-MP50.8	± 2	± 2	about 0.26	about 0.26	0.24
HTFM-12.7C08-1064-MHG-MP	1064	$\phi 12.7$	>99.5	MHG-MP12.7	± 3	± 3	about 0.74	about 0.74	0.04
HTFM-25.4C08-1064-MHG-MP	1064	$\phi 25.4$	>99.5	MHG-MP25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-25.4C08-1064-MHG-HS	1064	$\phi 25.4$	>99.5	MHG-HS25	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-1064-MHG-MP	1064	$\phi 30$	>99.5	MHG-MP30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-30C08-1064-MHG-HS	1064	$\phi 30$	>99.5	MHG-HS30	± 3	± 3	about 0.39	about 0.39	0.12
HTFM-50C11-1064-MHG-MP	1064	$\phi 50$	>99.5	MHG-MP50	± 2	± 2	about 0.26	about 0.26	0.24
HTFM-50.8C11-1064-MHG-MP	1064	$\phi 50.8$	>99.5	MHG-MP50.8	± 2	± 2	about 0.26	about 0.26	0.24

Outline Drawing


(in mm)

HTFM-12.7C08-MHG-MP

Hexagon socket head cap screw M4×6...1 screw

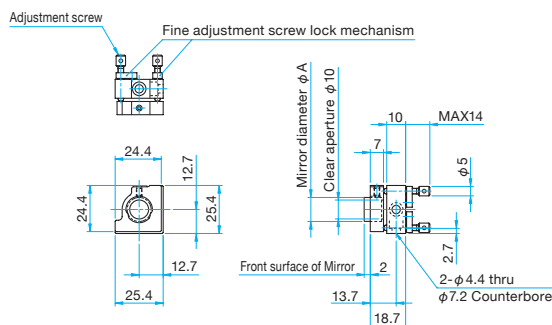HTFM-25.4C08-MHG-MP
HTFM-30C08-MHG-MP


Hexagon socket head cap screw M4×10...1 screw

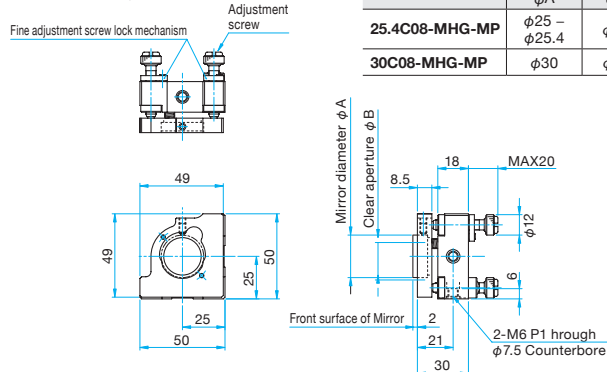

Part Number	Mirror diameter ϕA	Clear aperture ϕB
25.4C08-MHG-MP	$\phi 25 - \phi 25.4$	$\phi 22$
30C08-MHG-MP	$\phi 30$	$\phi 27$

HTFM-25.4C08-MHG-HS
HTFM-30C08-MHG-HS


Hexagon socket head cap screw M4×10...1 screw

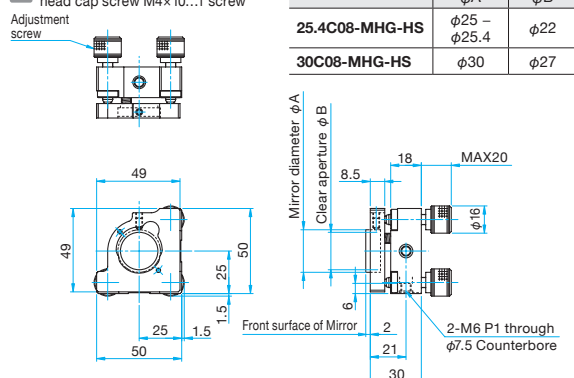

Part Number	Mirror diameter ϕA	Clear aperture ϕB
25.4C08-MHG-HS	$\phi 25 - \phi 25.4$	$\phi 22$
30C08-MHG-HS	$\phi 30$	$\phi 27$

HTFM-50C11-MHG-MP
HTFM-50.8C11-MHG-MP

Hexagon socket head cap screw M4×10...1 screw

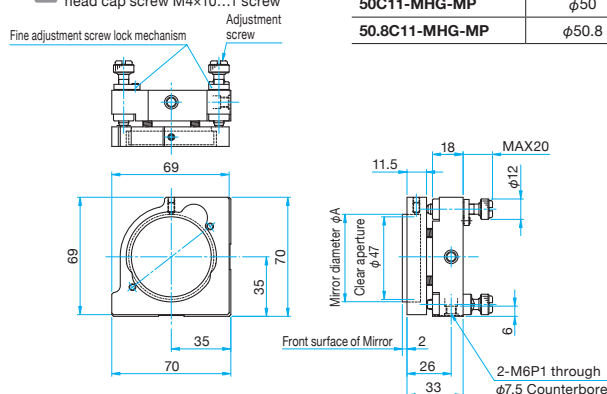

Part Number	Mirror diameter ϕA
50C11-MHG-MP	$\phi 50$
50.8C11-MHG-MP	$\phi 50.8$

Dielectric Mirrors for High Power Laser

TFMHP


RoHS

All dielectric coating designs are much more resistant to laser damage than typical mirrors and are suitable for use with high power laser systems.

- All Dielectric Mirrors for High Power Laser are manufactured using dielectric multi-layer coatings of alternating high and low index layers.
- The Mirrors are specifically designed for use at 45 degrees (AOI).
- All dielectric coating designs are much more resistant to laser damage than typical mirrors and are suitable for use with high power laser systems.
- Mirrors for YAG lasers are also available.




Schematic

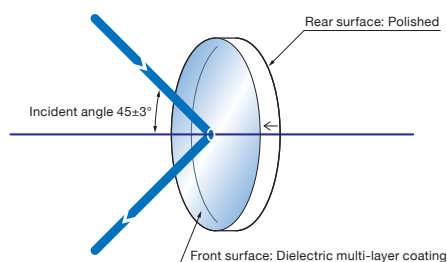

Outline Drawing

(in mm)

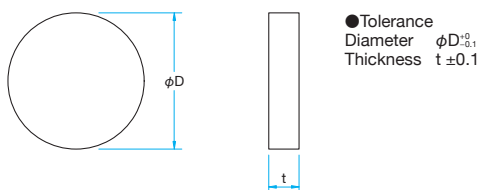

Specifications

Part Number	Wavelength Range [nm]	Diameter ϕD [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]
TFMHP-25.4C05-193	193	$\phi 25.4$	5	>95	2
TFMHP-30C05-193	193	$\phi 30$	5	>95	2
TFMHP-50C08-193	193	$\phi 50$	8	>95	2
TFMHP-25.4C05-248	248	$\phi 25.4$	5	>98	4
TFMHP-30C05-248	248	$\phi 30$	5	>98	4
TFMHP-50C08-248	248	$\phi 50$	8	>98	4
TFMHP-25.4C05-266	266	$\phi 25.4$	5	>98	5
TFMHP-30C05-266	266	$\phi 30$	5	>98	5
TFMHP-50C08-266	266	$\phi 50$	8	>98	5
TFMHP-25.4C05-355	355	$\phi 25.4$	5	>99	8
TFMHP-30C05-355	355	$\phi 30$	5	>99	8
TFMHP-50C08-355	355	$\phi 50$	8	>99	8
TFMHP-25.4C05-532	532	$\phi 25.4$	5	>99	26.5
TFMHP-30C05-532	532	$\phi 30$	5	>99	26.5
TFMHP-50C08-532	532	$\phi 50$	8	>99	26.5
TFMHP-25.4C05-1064	1064	$\phi 25.4$	5	>99	28
TFMHP-30C05-1064	1064	$\phi 30$	5	>99	28
TFMHP-50C08-1064	1064	$\phi 50$	8	>99	28

* Angle of incidence 0°, laser pulse width 10ns (TFMHP-193: 20ns), repetition frequency 20Hz

Specifications

Material	BK7
Coating	Dielectric multi-layer coating
Incident angle	45°±3°
Surface Flatness	$\lambda/10$
Parallelism	<3'
Surface Quality (Scratch-Dig)	10-5
Clear aperture	90% of Actual Aperture
Rear Surface	Polished

Guide

- ▶ Please consult our Sales Division for assistance in your selection and for customized products. (customized on outer diameter, wavelength characteristic, etc.) Please use the inquiry sheet. [Reference](#) B041
- ▶ Also available are our surface flatness guarantee (HTFM) mirrors with accuracy guarantee after surface coating. [Reference](#) B016

Attention

- ▶ Reflectance of dielectric mirrors will vary according to the polarization of the input beams.
- ▶ The un-coated rear surface of the mirror is polished and the arrow on the side of the substrate points towards the coated surface.
- ▶ Reflectance of laser line mirrors are different according to the polarization of input beams. S-polarization has the high reflectance and the wide reflective bandwidth compared with p-polarization. The reflectance in the specifications list is that of random polarization or (p-polarization reflectance + s-polarization reflectance) / 2.
- ▶ The reflectance curves are based on actual measurements and may vary with production lots.
- ▶ Be sure to wear laser safety goggles when checking optical path and adjusting optical axis.
- ▶ The surface flatness is the reflected surface wavefront distortion before coating.

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband







Dielectric Coating

Aluminum Coating

Gold Coating

Typical Reflectance Data

R: Reflectance

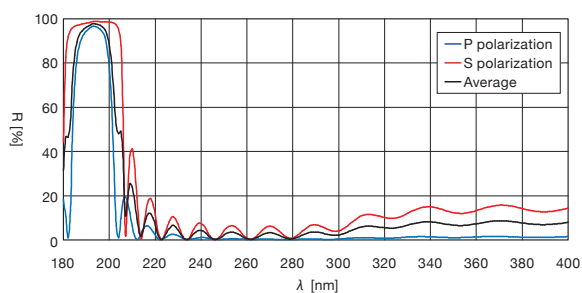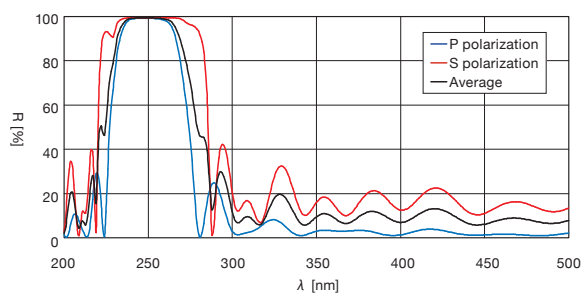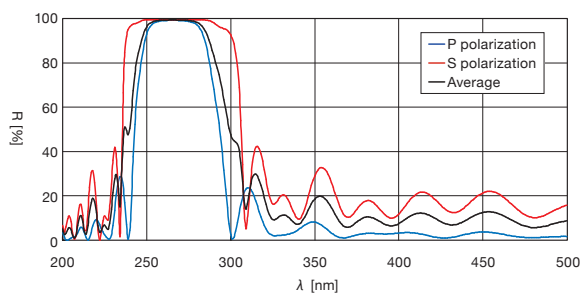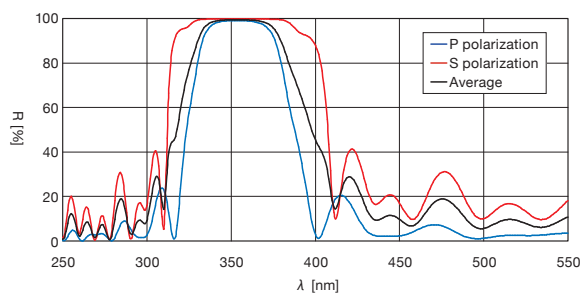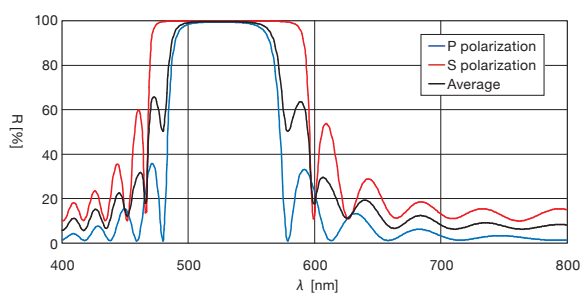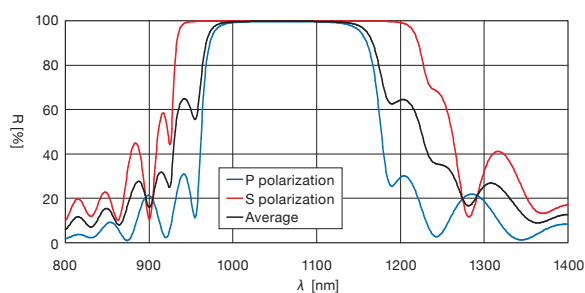TFMHP-193**TFMHP-248****TFMHP-266****TFMHP-355****TFMHP-532****TFMHP-1064****Compatible Optic Mounts**

MHG-HS25-NL, -HS30-NL / MHG-MP50-NL / MHAN-25.4S, -30S, -50S

Application
SystemsOptics &
Optical
CoatingsOpto-
Mechanics

Bases

Manual
StagesActuators &
AdjustersMotorized
StagesLight Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Ultra Broadband Dielectric Mirrors

TFMS

RoHS

Application
SystemsOptics &
Optical
CoatingsOpto-
Mechanics

Bases

Manual
StagesActuators &
AdjustersMotorized
StagesLight Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband


Dielectric Coating

Aluminum Coating


Gold Coating

Ultra Broadband Dielectric Mirrors are manufactured using all dielectric multi-layer coatings of alternating high and low index layers. These are specifically designed for use at 45 degrees angle of incidence. The mirrors are offered for use in applications where high-reflection over a broad wavelength range is required.

- Visible, near infrared and multiple wavelengths are covered with a single mirror.
- These mirrors have many advantages over a metal mirror including very little deterioration with age and that it is durable and easy to clean and maintain.


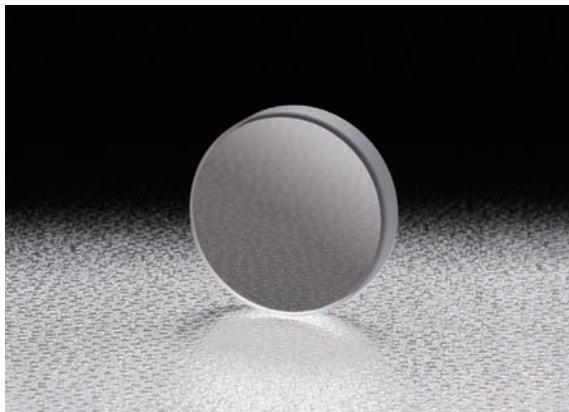


Schematic

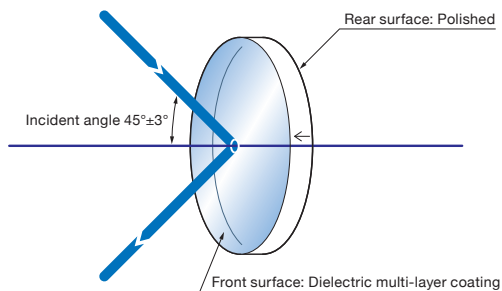

Outline Drawing

(in mm)



- Tolerance
Diameter $\phi D: \pm 0.1$
Thickness $t: \pm 0.1$

Specifications

Material	BK7
Coating	Dielectric multi-layer coating
Incident angle	$45^\circ \pm 3^\circ$
Surface Flatness	$\lambda/10$
Parallelism	$<3'$
Surface Quality (Scratch-Dig)	40-20
Clear aperture	90% of Actual Aperture
Rear Surface	Polished

Guide

- ▶ Please consult our Sales Division for assistance in your selection and for customized products. (customized on outer diameter, wavelength characteristic, etc.) Please use the inquiry sheet. [Reference](#) B041
- ▶ Also available are our surface flatness guarantee (HTFM) mirrors with accuracy guarantee after surface coating. [Reference](#) B016

Attention

- ▶ Reflectance of dielectric mirrors will vary according to the polarization of the input beams.
- ▶ The un-coated rear surface of the mirror is polished and the arrow on the side of the substrate points towards the coated surface. Reflectance of laser line mirrors are different according to the polarization of input beams. S-Polarization has high reflectance with a wide reflective bandwidth compared with P-Polarization.
- ▶ The reflectance specification listed is at random polarization or (P-Polarization reflectance + S-Polarization reflectance) / 2.






Specifications

Part Number	Wavelength Range [nm]	Diameter ϕD [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]
TFMS-25.4C05-2/4	245 – 400	$\phi 25.4$	5	> Average 97	0.5
TFMS-30C05-2/4	245 – 400	$\phi 30$	5	> Average 97	0.5
TFMS-25.4C05-2/7	245 – 700	$\phi 25.4$	5	> Average 97	0.5
TFMS-30C05-2/7	245 – 700	$\phi 30$	5	> Average 97	0.5
TFMS-25.4C05-4/11	400 – 1100	$\phi 25.4$	5	> Average 98	0.5
TFMS-30C05-4/11	400 – 1100	$\phi 30$	5	> Average 98	0.5
TFMS-50C08-4/11	400 – 1100	$\phi 50$	8	> Average 98	0.5
TFMS-25.4C05-4/20	400 – 2000	$\phi 25.4$	5	> Average 98	0.5
TFMS-30C05-4/20	400 – 2000	$\phi 30$	5	> Average 98	0.5
TFMS-50C08-4/20	400 – 2000	$\phi 50$	8	> Average 98	0.5
TFMS-25.4C05-3/20	300 – 2000	$\phi 25.4$	5	> Average 97	0.5
TFMS-30C05-3/20	300 – 2000	$\phi 30$	5	> Average 97	0.5
TFMS-50C08-3/20	300 – 2000	$\phi 50$	8	> Average 97	0.5

* Laser pulse width 10ns, wavelength 532nm, repetition frequency 20Hz

Typical Reflectance Data

R: Reflectance

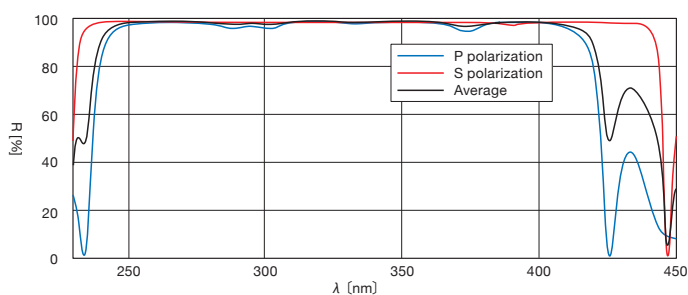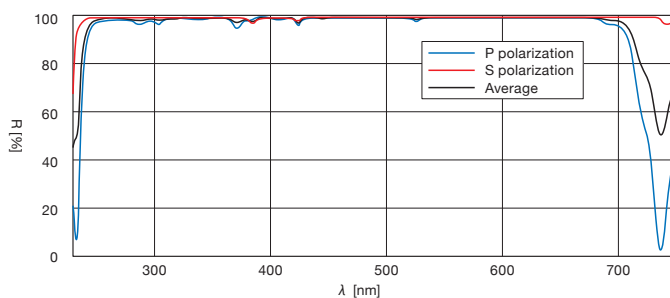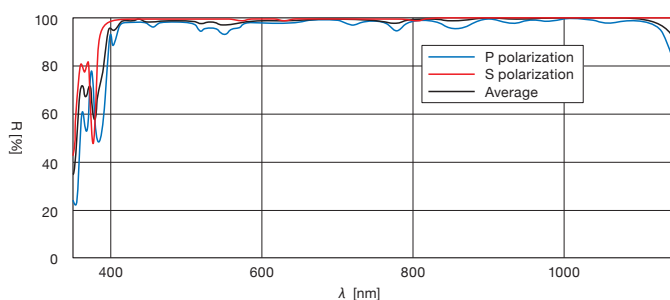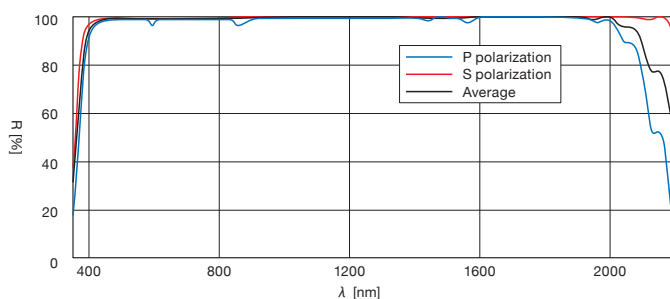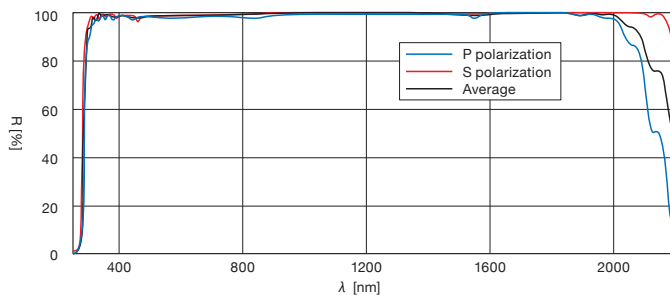TFMS-2/4**TFMS-2/7****TFMS-4/11****TFMS-4/20****TFMS-3/20****Compatible Optic Mounts**

MHG-HS25-NL, -HS30-NL / MHG-MP50-NL / MHAN-25.4S, -30S, -50S

Application
Systems**Optics &
Optical
Coatings**Opto-
Mechanics

Bases

Manual
StagesActuators &
AdjustersMotorized
StagesLight Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Laser Line Mirrors | TFM

RoHS

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband


Dielectric Coating

Aluminum Coating


Gold Coating

These laser mirrors are designed for specific wavelength laser applications where low wavefront distortion, low scattering and high reflectivity are usually important. These narrowband reflectors are for several wavelengths and sizes.

- Dielectric multi-layer coating does not have absorption like Aluminum coatings and provide higher than 99% reflectance except some mirrors for UV wavelength use are provide 95% reflectance.
- These coatings are much harder and provide higher laser damage threshold than Al+MgF2 coating.

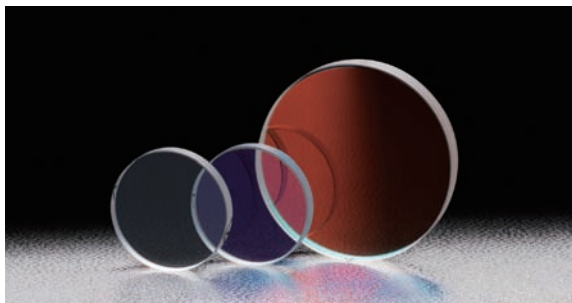


Schematic

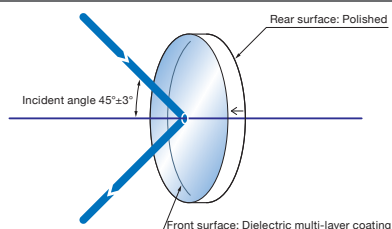

Outline Drawing

(in mm)

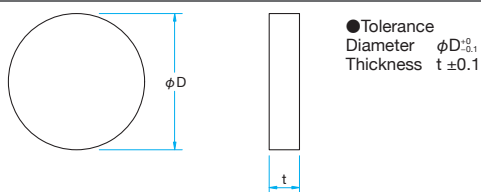

Specifications

Material	BK7 (CaF ₂ crystal for TFM-157 only)
Coating	Dielectric multi-layer coating
Incident angle	45°±3°
Surface Flatness	λ/10, Polished (TFM-157)
Parallelism	<3'
Surface Quality (Scratch-Dig)	10-5 (TFM-157: 40-20)
Clear aperture	90% of Actual Aperture

Guide

- ▶ Please consult our Sales Division for assistance in your selection and for customized products. (customized on outer diameter, wavelength characteristic, etc.) Please use the inquiry sheet. [Reference](#) B041
- ▶ Also available are our surface flatness guarantee (HTFM) mirrors with accuracy guarantee after surface coating. [Reference](#) B016

Attention

- ▶ The un-coated rear surface of the mirror is polished and the arrow on the side of the substrate points towards the coated surface.
- ▶ Reflectance values of laser line mirrors are different according to the polarization of input beams. S-Polarization has high reflectance with a wide reflective bandwidth when compared to P-Polarization. The reflectance specification listed is at random polarization or (P-Polarization reflectance + S-Polarization reflectance) / 2.
- ▶ The reflectance curves are based on actual measurements and may be vary by production lots.
- ▶ Be sure to wear laser safety goggles when checking optical path and adjusting optical axis.
- ▶ The surface flatness is the reflected surface wavefront distortion before coating.

Laser Line Mirrors Narrowband








157 – 337.1nm

Part Number	Wavelength Range [nm]	Diameter φD [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm²]	Rear Surface
TFM-30C03-157	157	φ30	3	>95.0	0.5	Polished
TFM-50C05-157	157	φ50	5	>95.0	0.5	Polished
TFM-25.4C05-193	193	φ25.4	5	>95.0	0.8	Polished
TFM-30C05-193	193	φ30	5	>95.0	0.8	Polished
TFM-50C08-193	193	φ50	8	>95.0	0.8	Polished
TFM-25.4C05-248	248.4	φ25.4	5	>99.0	2	Polished
TFM-30C05-248	248.4	φ30	5	>99.0	2	Polished
TFM-50C08-248	248.4	φ50	8	>99.0	2	Polished
TFM-25.4C05-266	266	φ25.4	5	>99.2	2	Polished
TFM-30C05-266	266	φ30	5	>99.2	2	Polished
TFM-50C08-266	266	φ50	8	>99.2	2	Polished
TFM-25.4C05-282	281.8	φ25.4	5	>99.3	2	Polished
TFM-30C05-282	281.8	φ30	5	>99.3	2	Polished
TFM-50C08-282	281.8	φ50	8	>99.3	2	Polished
TFM-25.4C05-308	308	φ25.4	5	>99.5	3	Polished
TFM-30C05-308	308	φ30	5	>99.5	3	Polished
TFM-50C08-308	308	φ50	8	>99.5	3	Polished
TFM-25.4C05-325/337	325 – 337	φ25.4	5	>99.5	3	Polished
TFM-30C05-325/337	325 – 337	φ30	5	>99.5	3	Polished
TFM-50C08-325/337	325 – 337	φ50	8	>99.5	3	Polished

* Laser pulse width 10ns (TFM-157, TFM-193: 20ns), repetition frequency 20Hz

Typical Reflectance Data ... Laser Line Mirrors Narrowband

R: Reflectance

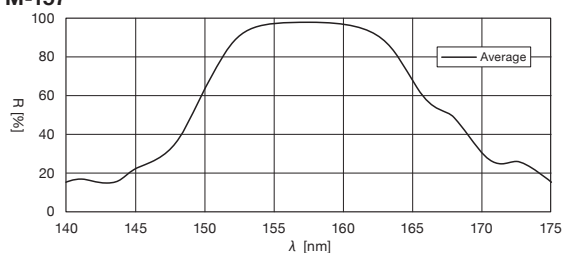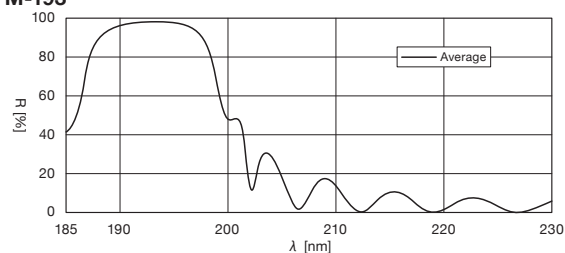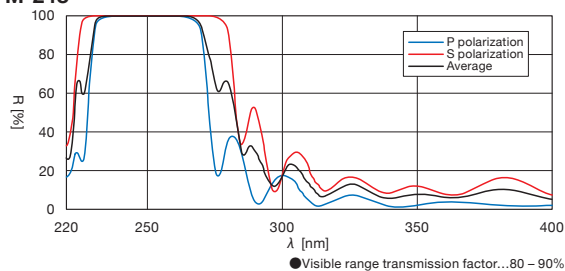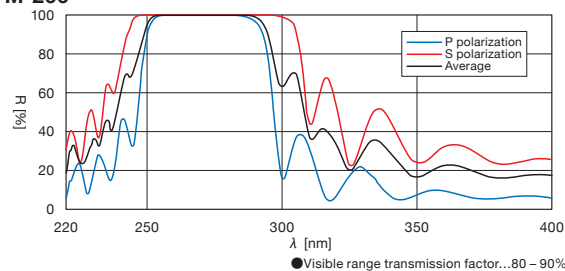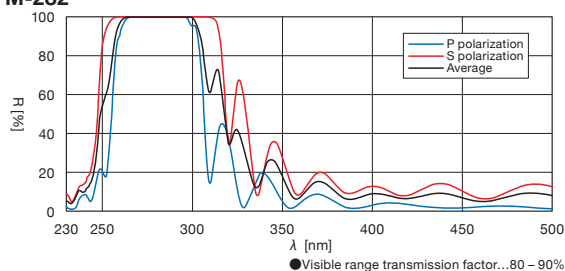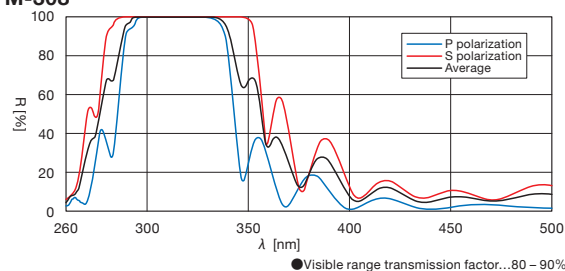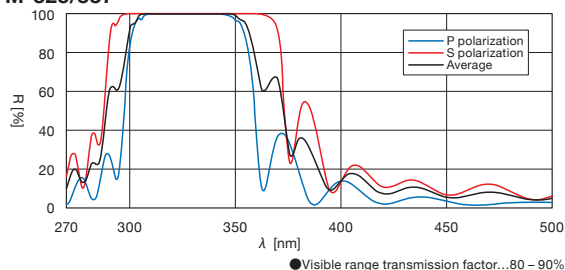TFM-157**TFM-193****TFM-248****TFM-266****TFM-282****TFM-308****TFM-325/337****Compatible Optic Mounts**

MHG-MP12.7-NL / MHG-HS25-NL, -HS30-NL / MHG-MP50-NL, -MP50.8-NL

Application
SystemsOptics &
Optical
CoatingsOpto-
Mechanics

Bases

Manual
StagesActuators &
AdjustersMotorized
StagesLight Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Laser Line Mirrors | TFM

Laser Line Mirrors Narrowband


352 – 1064nm						
Part Number	Wavelength Range [nm]	Diameter D [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]	Rear Surface
TFM-25.4C05-352/355	352 – 355	φ25.4	5	>99.5	5	Polished
TFM-30C05-352/355	352 – 355	φ30	5	>99.5	5	Polished
TFM-50C08-352/355	352 – 355	φ50	8	>99.5	5	Polished
TFM-12.7C05-532	532	φ12.7	5	>99.5	8	Ground
TFM-25C05-532	532	φ25	5	>99.5	8	Polished
TFM-25.4C05-532	532	φ25.4	5	>99.5	8	Polished
TFM-30C05-532	532	φ30	5	>99.5	8	Polished
TFM-40C06-532	532	φ40	6	>99.5	8	Polished
TFM-50C08-532	532	φ50	8	>99.5	8	Polished
TFM-50.8C08-532	532	φ50.8	8	>99.5	8	Polished
TFM-12.7C05-1064	1064	φ12.7	5	>99.5	20	Ground
TFM-25.4C05-1064	1064	φ25.4	5	>99.5	20	Polished
TFM-30C05-1064	1064	φ30	5	>99.5	20	Polished
TFM-40C06-1064	1064	φ40	6	>99.5	20	Polished
TFM-50C08-1064	1064	φ50	8	>99.5	20	Polished
TFM-50.8C08-1064	1064	φ50.8	8	>99.5	20	Polished

* Laser pulse width 10ns, repetition frequency 20Hz


Typical Reflectance Data ... Laser Line Mirrors Narrowband

R: Reflectance


TFM-352/355

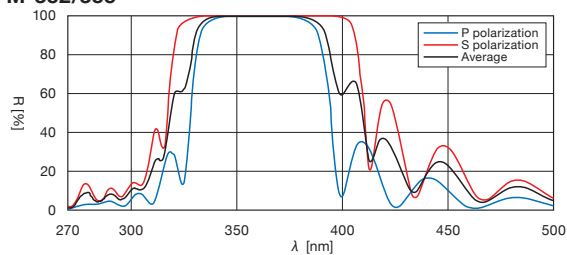

TFM-532

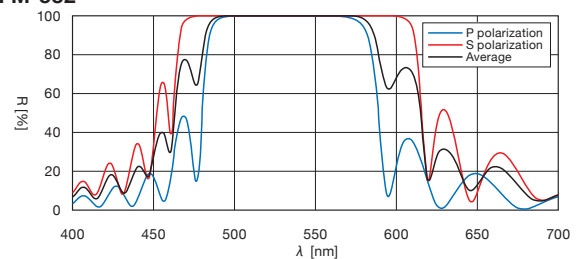

TFM-1064

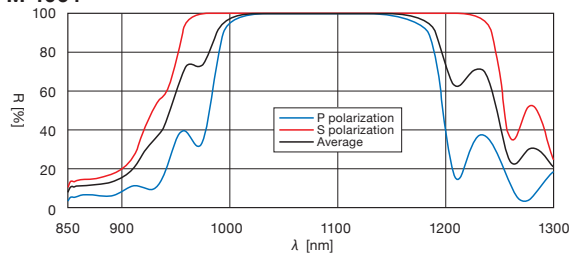

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband


Dielectric Coating

Aluminum Coating


Gold Coating

You can use the 0-45° Wide Angle Dielectric Mirrors for an optical system for reciprocating the light between two mirrors or Michelson interferometer, if you want to use a mirror at an incident angle of 45° or less. When used at 45 degree and 0 degree incidence angle, one mirror can be shared to obtain high reflectivity.

- Very high reflectivity can be obtained between 0 degree to 45 degree angle of incidence.
- If used at a fixed angle of incidence, it can also be used as a broadband mirror. For example, if TFVM-800 is used in a 45 degree incident, reflectance of 99% or more can be obtained in the range of 730nm to 900nm.
- Since there is no absorption in the coating there will be very little change in the performance over time and the mirror is durable even with continuous laser irradiation.

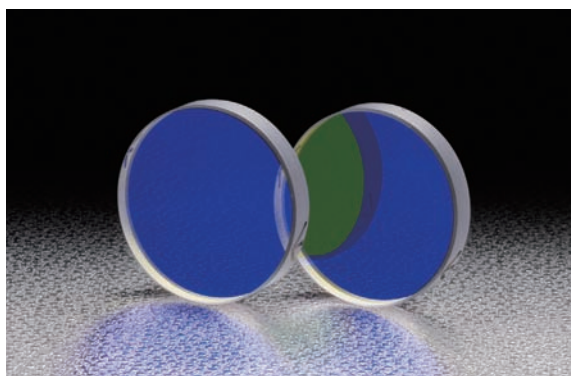


Schematic

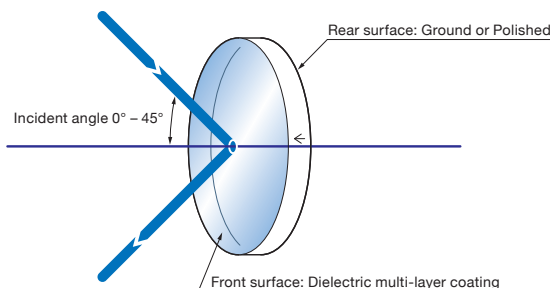

Outline Drawing

(in mm)



- Tolerance
Diameter $\phi D: \pm 0.1$
Thickness $t: \pm 0.1$

Specifications

Material	BK7
Coating	Dielectric multi-layer coating
Incident angle	0° – 45°
Surface Flatness	$\lambda/10$
Parallelism	<3'
Surface Quality (Scratch-Dig)	10-5
Clear aperture	90% of Actual Aperture

Guide

- ▶ Please consult our Sales Division for assistance in your selection and for customized products. (customized on outer diameter, wavelength characteristic, etc.) Please use the inquiry sheet. [Reference](#) B041
- ▶ This mirror is also available as a "HTFM mirror" which provides guaranteed surface accuracy after coating. [Reference](#) B016

Attention

- ▶ Reflectance wavelength characteristics of dielectric multilayer coating vary depending on the polarization state of the incident beam. Reflectance of P-polarized light is lower than that of the S-polarized light, and the reflection range will also be narrower.
- ▶ When used not in adaptive wavelength, reflectance may be lower.
- ▶ If a mirror is used other than normal incidence, wavelength reflectance characteristics also vary depending on the polarization condition.
- ▶ The reflectance characteristics of the 45 degree angle of incidence listed are the average value of the reflectance of P-polarized light and S-polarized light.

400 – 700nm

Part Number	Wavelength Range [nm]	Diameter ϕD [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]	Rear Surface
TFVM-15C03-405	405	$\phi 15$	3	>99	0.5	Ground
TFVM-25.4C05-405	405	$\phi 25.4$	5	>99	0.5	Polished
TFVM-30C05-405	405	$\phi 30$	5	>99	0.5	Polished
TFVM-50C08-405	405	$\phi 50$	8	>99	0.5	Polished
TFVM-25.4C05-532	532	$\phi 25.4$	5	>99	8	Polished
TFVM-30C05-532	532	$\phi 30$	5	>99	8	Polished
TFVM-50C08-532	532	$\phi 50$	8	>99	8	Polished
TFVM-10C03-VIS	400 – 700	$\phi 10$	3	>99	0.5	Ground
TFVM-15C03-VIS	400 – 700	$\phi 15$	3	>99	0.5	Ground
TFVM-15C05-VIS	400 – 700	$\phi 15$	5	>99	0.5	Ground
TFVM-20C03-VIS	400 – 700	$\phi 20$	3	>99	0.5	Ground
TFVM-20C05-VIS	400 – 700	$\phi 20$	5	>99	0.5	Ground
TFVM-25C05-VIS	400 – 700	$\phi 25$	5	>99	0.5	Polished
TFVM-25.4C05-VIS	400 – 700	$\phi 25.4$	5	>99	0.5	Polished
TFVM-30C05-VIS	400 – 700	$\phi 30$	5	>99	0.5	Polished
TFVM-40C06-VIS	400 – 700	$\phi 40$	6	>99	0.5	Polished
TFVM-50C08-VIS	400 – 700	$\phi 50$	8	>99	0.5	Polished

* Laser pulse width 10ns, repetition frequency 20Hz

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

0-45° Wide Angle Dielectric Mirrors | **TFVM**Application
SystemsOptics &
Optical
CoatingsOpto-
Mechanics

Bases

Manual
StagesActuators &
AdjustersMotorized
StagesLight Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

780 – 1550nm


Part Number	Wavelength Range [nm]	Diameter ϕ D [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]	Rear Surface
TFVM-10C03-800	780 – 830	ϕ 10	3	>99	0.5	Ground
TFVM-15C03-800	780 – 830	ϕ 15	3	>99	0.5	Ground
TFVM-15C05-800	780 – 830	ϕ 15	5	>99	0.5	Ground
TFVM-20C03-800	780 – 830	ϕ 20	3	>99	0.5	Ground
TFVM-20C05-800	780 – 830	ϕ 20	5	>99	0.5	Ground
TFVM-25C05-800	780 – 830	ϕ 25	5	>99	0.5	Polished
TFVM-25.4C05-800	780 – 830	ϕ 25.4	5	>99	0.5	Polished
TFVM-30C05-800	780 – 830	ϕ 30	5	>99	0.5	Polished
TFVM-40C06-800	780 – 830	ϕ 40	6	>99	0.5	Polished
TFVM-50C08-800	780 – 830	ϕ 50	8	>99	0.5	Polished
TFVM-25.4C05-1064	1064	ϕ 25.4	5	>99	20	Polished
TFVM-30C05-1064	1064	ϕ 30	5	>99	20	Polished
TFVM-50C08-1064	1064	ϕ 50	8	>99	20	Polished
TFVM-15C03-1300	1300	ϕ 15	3	>99	1	Ground
TFVM-25.4C05-1300	1300	ϕ 25.4	5	>99	1	Polished
TFVM-30C05-1300	1300	ϕ 30	5	>99	1	Polished
TFVM-15C03-1550	1550	ϕ 15	3	>99	1	Ground
TFVM-25.4C05-1550	1550	ϕ 25.4	5	>99	1	Polished
TFVM-30C05-1550	1550	ϕ 30	5	>99	1	Polished

* Laser pulse width 10ns, repetition frequency 20Hz


Typical Reflectance Data

R: Reflectance


TFVM-405

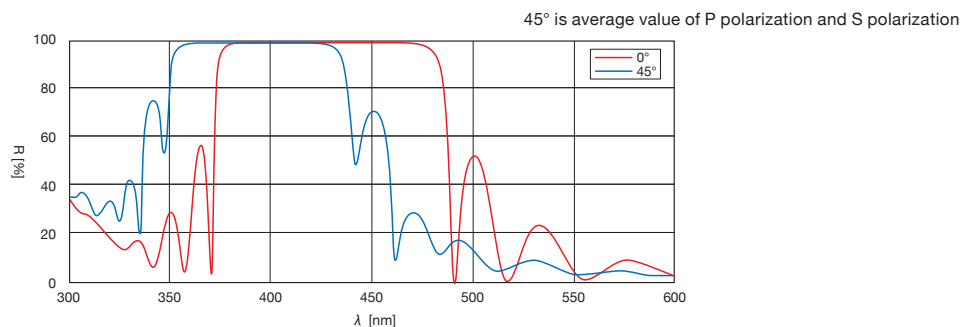

TFVM-532

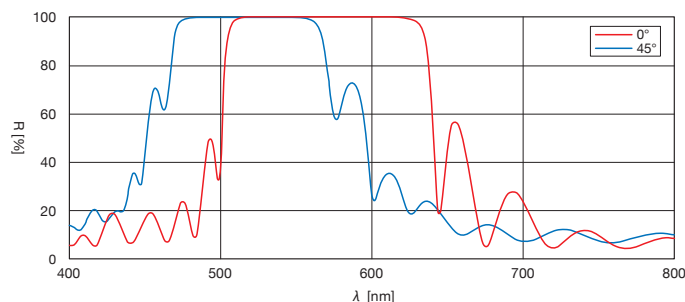

TFVM-VIS

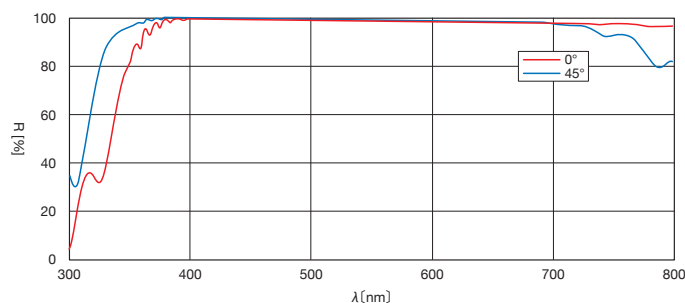




Typical Reflectance Data


R: Reflectance

45° is average value of P polarization and S polarization


TFVM-800

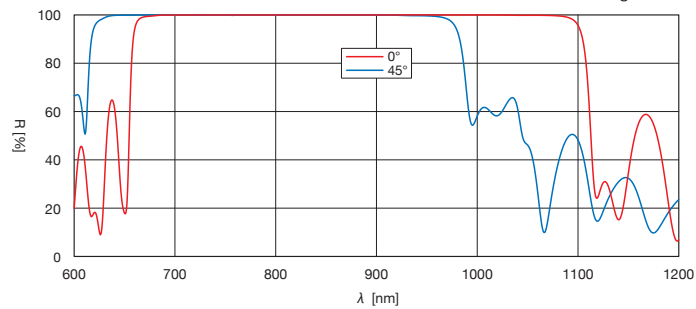


TFVM-1064

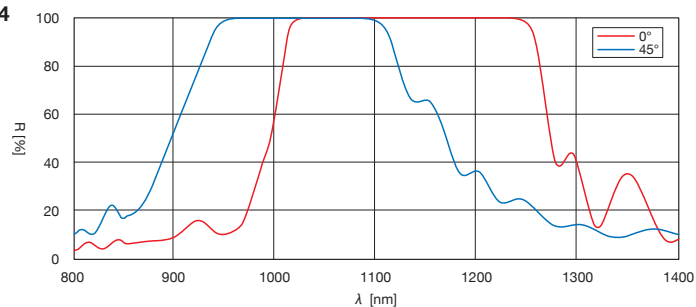

TFVM-1300

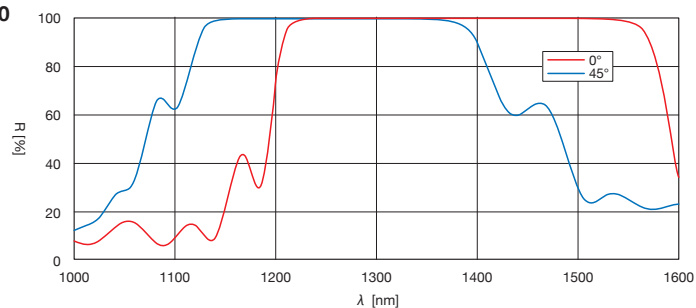

TFVM-1550

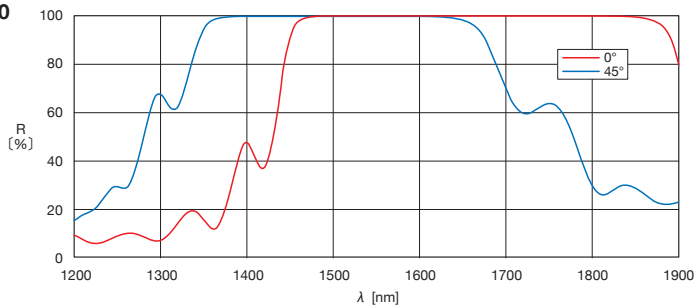

Compatible Optic Mounts

MHG-MP30-NL / MHG-MP50-NL / BSHL-15-2

Application
Systems

Optics &
Optical
Coatings

Opto-
Mechanics

Bases

Manual
Stages

Actuators &
Adjusters

MotORIZED
Stages

Light Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Aluminum Mirrors

TFA/TFAN/TFAQ/TFAQN/TFAE/OPBA/OPSQA


RoHS

This is a vapor-deposited aluminium flat mirror with the substrate polished with high accuracy, designed for high reflectivity at any incident angle.

- With four types to choose from; (TFAN/TFAQN) which is coated with aluminium only, (TFA/TFAQ) which is coated with a protective coating against accidental hard scratches, (TFAE) which is coated aluminium and a protective coating to increase the reflectance of ultraviolet and lastly, (OPBA/OPSQA) which provides Aluminum with protective coat on the optical parallel substrate.
- For ultraviolet, visible and near-infrared light applications.
- For low thermal expansion mirrors, we have (TFAQ/TFAQN) which is made of Synthetic fused silica that provides high rigidity and high precision surface quality.



Schematic

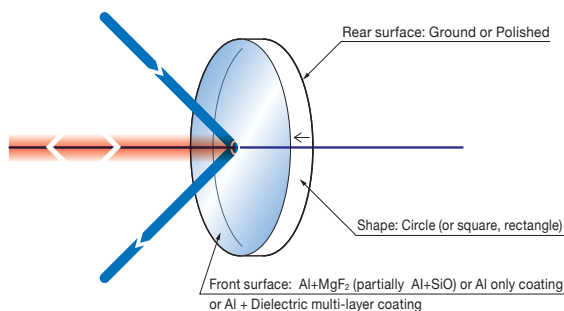

Specifications

Material	BK7 Synthetic fused silica Hard glass (Pyrex® etc.)
Coating	TFAN/TFAQN: Al (without protection coating) TFA/TFAQ/OPBA/OPSQA: Al+MgF ₂ (surface flatness λ/20 is Al+SiO ₂) TFAE: Al + Dielectric multi-layer coating
Parallelism	TFA/TFAN/TFAQ/TFAQN/TFAE: <3' OPBA/OPSQA: <2"
Incident angle	TFA/TFAQ/TFAE: 45° OPBA/OPSQA: 0°
Laser Damage Threshold	0.25J/cm ² (pulse width 10ns, repetition frequency 20Hz)
Surface Quality (Scratch-Dig)	40-20
Clear aperture	90% of actual aperture or circle or ellipse that contacts 90% square of dimension

Guide

- ▶ If you need a higher reflectance aluminium mirror, please kindly contact us.
- ▶ Should you require a surface accuracy analysis/data, please kindly contact our sales group.
- ▶ For non-standard sizes other than those listed in the product table, please kindly contact us.
- ▶ Pyrex® is a registered trademark of Corning Inc.


Attention

- ▶ For aluminium mirrors without a protective film, (TFAN/TFAQN) handle carefully as they can be easily scratched oxidation builds up in the surface. Do not rub the surface with paper or cloth as this will harm the surface. For long term storage, use a de-oxidizer to prevent the oxidation.
- ▶ When a laser light is transmitted with multiple mirrors installed there will be a large amount of light loss due to the absorption of the aluminium coating. Please consider using dielectric multi-layer mirrors (TFM) for improved performance.
- ▶ The reflectance specification are represented by the average of the reflectance of P polarized light and S polarized light. Reflectance may vary depending on the polarization state of the incident beam.

Outline Drawing

(in mm)


●Circle



●Tolerance

$\phi D \leq \phi 50$ Diameter $\phi D_{+0.1}^{+0.0}$ Thickness $t \pm 0.1$
 $\phi 60 \leq \phi D$ Diameter $\phi D_{+0.2}^{+0.0}$ Thickness $t \pm 0.2$


●Square



●Tolerance

$A \leq 50$ Length $A_{+0.1}^{+0.0}$ Thickness $t \pm 0.1$
 $60 \leq A$ Length $A_{+0.2}^{+0.0}$ Thickness $t \pm 0.2$

●Rectangle




●Tolerance

$A \times B \leq 40 \times 50$ Length $A \cdot B_{+0.1}^{+0.0}$ Thickness $t \pm 0.1$
 $50 \times 60 \leq A \times B$ Length $A \cdot B_{+0.2}^{+0.0}$ Thickness $t \pm 0.2$


Typical Reflectance Data

R: Reflectance

Wide Band (1000 – 1200nm)

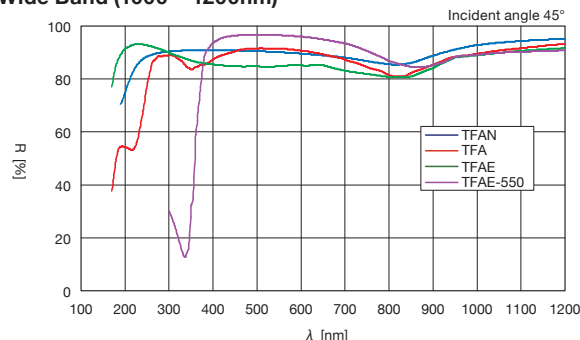

Ultraviolet-visible range (150 – 700nm)

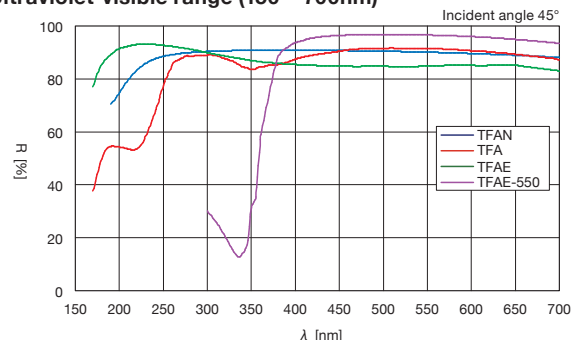

Circle		Diameter ϕ D [mm]	Thickness t [mm]	Material	Surface Flatness	Rear Surface
Al+MgF ₂ (partially Al+SiO)	Al only					
Part Number	Part Number					
TFA-10C03-4	—	ϕ 10	3	BK7	$\lambda/4$	Ground
TFA-10C03-10	TFAN-10C03-10	ϕ 10	3	BK7	$\lambda/10$	Ground
TFA-10C05-10	TFAN-10C05-10	ϕ 10	5	BK7	$\lambda/10$	Ground
TFA-10C05-20	TFAN-10C05-20	ϕ 10	5	BK7	$\lambda/20$	Ground
TFAQ-10C06-20	TFAQN-10C06-20	ϕ 10	6	Synthetic Fused Silica	$\lambda/20$	Ground
TFA-12.7C05-4	—	ϕ 12.7	5	BK7	$\lambda/4$	Ground
TFA-12.7C05-10	—	ϕ 12.7	5	BK7	$\lambda/10$	Ground
TFAQ-12.7C06-20	—	ϕ 12.7	6	Synthetic Fused Silica	$\lambda/20$	Ground
TFA-15C03-10	TFAN-15C03-10	ϕ 15	3	BK7	$\lambda/10$	Ground
TFA-15C05-10	TFAN-15C05-10	ϕ 15	5	BK7	$\lambda/10$	Ground
TFA-15C05-20	TFAN-15C05-20	ϕ 15	5	BK7	$\lambda/20$	Ground
TFAQ-15C06-20	TFAQN-15C06-20	ϕ 15	6	Synthetic Fused Silica	$\lambda/20$	Ground
TFA-20C03-10	TFAN-20C03-10	ϕ 20	3	BK7	$\lambda/10$	Ground
TFA-20C05-4	TFAN-20C05-4	ϕ 20	5	BK7	$\lambda/4$	Ground
TFA-20C05-10	TFAN-20C05-10	ϕ 20	5	BK7	$\lambda/10$	Ground
TFA-20C05-20	TFAN-20C05-20	ϕ 20	5	BK7	$\lambda/20$	Ground
TFAQ-20C06-20	TFAQN-20C06-20	ϕ 20	6	Synthetic Fused Silica	$\lambda/20$	Ground
TFA-25C05-1	TFAN-25C05-1	ϕ 25	5	BK7	λ	Polished
TFA-25C05-4	TFAN-25C05-4	ϕ 25	5	BK7	$\lambda/4$	Polished
TFA-25C05-10	TFAN-25C05-10	ϕ 25	5	BK7	$\lambda/10$	Polished
TFA-25C05-20	TFAN-25C05-20	ϕ 25	5	BK7	$\lambda/20$	Polished
TFAQ-25C06-20	TFAQN-25C06-20	ϕ 25	6	Synthetic Fused Silica	$\lambda/20$	Polished
TFA-25.4C05-4	—	ϕ 25.4	5	BK7	$\lambda/4$	Polished
TFA-25.4C05-10	TFAN-25.4C05-10	ϕ 25.4	5	BK7	$\lambda/10$	Polished
TFAQ-25.4C06-20	—	ϕ 25.4	6	Synthetic Fused Silica	$\lambda/20$	Polished
TFA-30C05-1	TFAN-30C05-1	ϕ 30	5	BK7	λ	Polished
TFA-30C05-4	TFAN-30C05-4	ϕ 30	5	BK7	$\lambda/4$	Polished
TFA-30C05-10	TFAN-30C05-10	ϕ 30	5	BK7	$\lambda/10$	Polished
TFA-30C05-20	TFAN-30C05-20	ϕ 30	5	BK7	$\lambda/20$	Polished
TFAQ-30C06-20	TFAQN-30C06-20	ϕ 30	6	Synthetic Fused Silica	$\lambda/20$	Polished
TFA-40C06-1	TFAN-40C06-1	ϕ 40	6	BK7	λ	Polished
TFA-40C06-4	TFAN-40C06-4	ϕ 40	6	BK7	$\lambda/4$	Polished
TFA-40C06-10	TFAN-40C06-10	ϕ 40	6	BK7	$\lambda/10$	Polished
TFA-40C06-20	TFAN-40C06-20	ϕ 40	6	BK7	$\lambda/20$	Polished
TFAQ-40C08-20	TFAQN-40C08-20	ϕ 40	8	Synthetic Fused Silica	$\lambda/20$	Polished
TFA-50C08-1	TFAN-50C08-1	ϕ 50	8	BK7	λ	Polished
TFA-50C08-4	TFAN-50C08-4	ϕ 50	8	BK7	$\lambda/4$	Polished
TFA-50C08-10	TFAN-50C08-10	ϕ 50	8	BK7	$\lambda/10$	Polished
TFA-50C08-20	TFAN-50C08-20	ϕ 50	8	BK7	$\lambda/20$	Polished
TFAQ-50C10-20	TFAQN-50C10-20	ϕ 50	10	Synthetic Fused Silica	$\lambda/20$	Polished
TFA-50.8C08-10	—	ϕ 50.8	8	BK7	$\lambda/10$	Polished
TFA-60C10-1	TFAN-60C10-1	ϕ 60	10	Hard glass	λ	Polished
TFA-60C10-4	TFAN-60C10-4	ϕ 60	10	Hard glass	$\lambda/4$	Polished
TFA-60C10-10	TFAN-60C10-10	ϕ 60	10	Hard glass	$\lambda/10$	Polished
TFA-60C10-20	TFAN-60C10-20	ϕ 60	10	Hard glass	$\lambda/20$	Polished
TFA-80C12-1	TFAN-80C12-1	ϕ 80	12	Hard glass	λ	Polished
TFA-80C12-4	TFAN-80C12-4	ϕ 80	12	Hard glass	$\lambda/4$	Polished
TFA-80C12-10	TFAN-80C12-10	ϕ 80	12	Hard glass	$\lambda/10$	Polished
TFA-80C12-20	TFAN-80C12-20	ϕ 80	12	Hard glass	$\lambda/20$	Polished
TFA-100C15-1	TFAN-100C15-1	ϕ 100	15	Hard glass	λ	Polished
TFA-100C15-4	TFAN-100C15-4	ϕ 100	15	Hard glass	$\lambda/4$	Polished
TFA-100C15-10	TFAN-100C15-10	ϕ 100	15	Hard glass	$\lambda/10$	Polished
TFA-130C18-1	TFAN-130C18-1	ϕ 130	18	Hard glass	λ	Polished
TFA-130C18-4	TFAN-130C18-4	ϕ 130	18	Hard glass	$\lambda/4$	Polished
TFA-130C18-10	TFAN-130C18-10	ϕ 130	18	Hard glass	$\lambda/10$	Polished
TFA-150C20-1	TFAN-150C20-1	ϕ 150	20	Hard glass	λ	Polished
TFA-150C20-4	TFAN-150C20-4	ϕ 150	20	Hard glass	$\lambda/4$	Polished
TFA-150C20-10	TFAN-150C20-10	ϕ 150	20	Hard glass	$\lambda/10$	Polished

Compatible Optic Mounts

MHG-MP12.7-NL / MHG-HS25-NL, -HS30-NL / MHG-MP50-NL, -MP50.8-NL / MAD-30-10 + MHL-30S / BSHL-15-2 / MHF-20
 MHAN-40S, -60S / MHA-80S, -100AS, -130AS, -150S

Application
SystemsOptics &
Optical
CoatingsOpto-
Mechanics

Bases

Manual
StagesActuators &
AdjustersMotorized
StagesLight Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Aluminum Mirrors

TFA/TFAN/TFAQ/TFAQN/TFAE/OPBA/OPSQA

RoHS

Catalog Code W3405

UV Enhanced Aluminum Flat Mirrors

Part Number	Wavelength Range [nm]	Reflectance [%]	Diameter ϕ D [mm]	Thickness t [mm]	Material	Surface Flatness	Rear Surface
TFAE-12.7C05-10	170 – 400	> average 85	ϕ 12.7	5	BK7	$\lambda/10$	Ground
TFAE-25.4C05-10	170 – 400	> average 85	ϕ 25.4	5	BK7	$\lambda/10$	Polished
TFAE-30C05-10	170 – 400	> average 85	ϕ 30	5	BK7	$\lambda/10$	Polished
TFAE-50C08-10	170 – 400	> average 85	ϕ 50	8	BK7	$\lambda/10$	Polished
TFAE-12.7C05-10-550	400 – 700	> average 94	ϕ 12.7	5	BK7	$\lambda/10$	Ground
TFAE-25.4C05-10-550	400 – 700	> average 94	ϕ 25.4	5	BK7	$\lambda/10$	Polished
TFAE-30C05-10-550	400 – 700	> average 94	ϕ 30	5	BK7	$\lambda/10$	Polished

Catalog Code W3403

Square

Al+MgF ₂ (partially Al+SiO) Part Number	Al only Part Number	Length A [mm]	Thickness t [mm]	Material	Surface Flatness	Rear Surface
TFA-10S03-10	TFAN-10S03-10	\square 10	3	BK7	$\lambda/10$	Ground
TFA-10S05-10	TFAN-10S05-10	\square 10	5	BK7	$\lambda/10$	Ground
TFA-10S05-20	TFAN-10S05-20	\square 10	5	BK7	$\lambda/20$	Ground
TFAQ-10S06-20	TFAQN-10S06-20	\square 10	6	Synthetic fused silica	$\lambda/20$	Ground
TFA-12.7S03-4	—	\square 12.7	3	BK7	$\lambda/4$	Ground
TFA-12.7S03-10	—	\square 12.7	3	BK7	$\lambda/10$	Ground
TFA-15S03-4	TFAN-15S03-4	\square 15	3	BK7	$\lambda/4$	Ground
TFA-15S03-10	TFAN-15S03-10	\square 15	3	BK7	$\lambda/10$	Ground
TFA-15S05-4	TFAN-15S05-4	\square 15	5	BK7	$\lambda/4$	Ground
TFA-15S05-10	TFAN-15S05-10	\square 15	5	BK7	$\lambda/10$	Ground
TFA-15S05-20	TFAN-15S05-20	\square 15	5	BK7	$\lambda/20$	Ground
TFAQ-15S06-20	TFAQN-15S06-20	\square 15	6	Synthetic fused silica	$\lambda/20$	Ground
TFA-20S03-4	TFAN-20S03-4	\square 20	3	BK7	$\lambda/4$	Ground
TFA-20S03-10	TFAN-20S03-10	\square 20	3	BK7	$\lambda/10$	Ground
TFA-20S05-4	TFAN-20S05-4	\square 20	5	BK7	$\lambda/4$	Ground
TFA-20S05-10	TFAN-20S05-10	\square 20	5	BK7	$\lambda/10$	Ground
TFA-20S05-20	TFAN-20S05-20	\square 20	5	BK7	$\lambda/20$	Ground
TFAQ-20S06-20	TFAQN-20S06-20	\square 20	6	Synthetic fused silica	$\lambda/20$	Ground
TFA-25S05-1	TFAN-25S05-1	\square 25	5	BK7	λ	Ground
TFA-25S05-4	TFAN-25S05-4	\square 25	5	BK7	$\lambda/4$	Ground
TFA-25S05-10	TFAN-25S05-10	\square 25	5	BK7	$\lambda/10$	Ground
TFA-25S05-20	TFAN-25S05-20	\square 25	5	BK7	$\lambda/20$	Ground
TFAQ-25S06-20	TFAQN-25S06-20	\square 25	6	Synthetic fused silica	$\lambda/20$	Ground
TFA-30S05-1	TFAN-30S05-1	\square 30	5	BK7	λ	Ground
TFA-30S05-4	TFAN-30S05-4	\square 30	5	BK7	$\lambda/4$	Ground
TFA-30S05-10	TFAN-30S05-10	\square 30	5	BK7	$\lambda/10$	Ground
TFA-30S05-20	TFAN-30S05-20	\square 30	5	BK7	$\lambda/20$	Ground
TFAQ-30S06-20	TFAQN-30S06-20	\square 30	6	Synthetic fused silica	$\lambda/20$	Ground
TFA-40S06-1	TFAN-40S06-1	\square 40	6	Hard glass	λ	Polished
TFA-40S06-4	TFAN-40S06-4	\square 40	6	Hard glass	$\lambda/4$	Polished
TFA-40S06-10	TFAN-40S06-10	\square 40	6	Hard glass	$\lambda/10$	Polished
TFA-40S06-20	TFAN-40S06-20	\square 40	6	Hard glass	$\lambda/20$	Polished
TFA-50S08-1	TFAN-50S08-1	\square 50	8	Hard glass	λ	Polished
TFA-50S08-4	TFAN-50S08-4	\square 50	8	Hard glass	$\lambda/4$	Polished
TFA-50S08-10	TFAN-50S08-10	\square 50	8	Hard glass	$\lambda/10$	Polished
TFA-50S08-20	TFAN-50S08-20	\square 50	8	Hard glass	$\lambda/20$	Polished
TFA-60S10-1	TFAN-60S10-1	\square 60	10	Hard glass	λ	Polished
TFA-60S10-4	TFAN-60S10-4	\square 60	10	Hard glass	$\lambda/4$	Polished
TFA-60S10-10	TFAN-60S10-10	\square 60	10	Hard glass	$\lambda/10$	Polished
TFA-60S10-20	TFAN-60S10-20	\square 60	10	Hard glass	$\lambda/20$	Polished
TFA-80S12-1	TFAN-80S12-1	\square 80	12	Hard glass	λ	Polished
TFA-80S12-4	TFAN-80S12-4	\square 80	12	Hard glass	$\lambda/4$	Polished
TFA-80S12-10	TFAN-80S12-10	\square 80	12	Hard glass	$\lambda/10$	Polished
TFA-80S12-20	TFAN-80S12-20	\square 80	12	Hard glass	$\lambda/20$	Polished
TFA-100S15-1	TFAN-100S15-1	\square 100	15	Hard glass	λ	Polished
TFA-100S15-4	TFAN-100S15-4	\square 100	15	Hard glass	$\lambda/4$	Polished
TFA-100S15-10	TFAN-100S15-10	\square 100	15	Hard glass	$\lambda/10$	Polished
TFA-130S18-1	TFAN-130S18-1	\square 130	18	Hard glass	λ	Polished
TFA-130S18-4	TFAN-130S18-4	\square 130	18	Hard glass	$\lambda/4$	Polished
TFA-130S18-10	TFAN-130S18-10	\square 130	18	Hard glass	$\lambda/10$	Polished
TFA-150S20-1	TFAN-150S20-1	\square 150	20	Hard glass	λ	Polished
TFA-150S20-4	TFAN-150S20-4	\square 150	20	Hard glass	$\lambda/4$	Polished
TFA-150S20-10	TFAN-150S20-10	\square 150	20	Hard glass	$\lambda/10$	Polished

Compatible Optic Mounts

CHA-25, -60, -130 / LHA-150

Rectangle						
Al+MgF ₂ (partially Al+SiO) Part Number	Al only Part Number	Length A×B [mm]	Thickness t [mm]	Material	Surface Flatness	Rear Surface
TFA-1015R03-4	TFAN-1015R03-4	10×15	3	BK7	λ/4	Ground
TFA-1015R03-10	TFAN-1015R03-10	10×15	3	BK7	λ/10	Ground
TFA-1015R05-4	TFAN-1015R05-4	10×15	5	BK7	λ/4	Ground
TFA-1015R05-10	TFAN-1015R05-10	10×15	5	BK7	λ/10	Ground
TFA-1015R05-20	TFAN-1015R05-20	10×15	5	BK7	λ/20	Ground
TFAQ-1015R06-20	TFAQN-1015R06-20	10×15	6	Synthetic fused silica	λ/20	Ground
TFA-1525R03-4	TFAN-1525R03-4	15×25	3	BK7	λ/4	Ground
TFA-1525R03-10	TFAN-1525R03-10	15×25	3	BK7	λ/10	Ground
TFA-1525R05-4	TFAN-1525R05-4	15×25	5	BK7	λ/4	Ground
TFA-1525R05-10	TFAN-1525R05-10	15×25	5	BK7	λ/10	Ground
TFA-1525R05-20	TFAN-1525R05-20	15×25	5	BK7	λ/20	Ground
TFAQ-1525R06-20	TFAQN-1525R06-20	15×25	6	Synthetic fused silica	λ/20	Ground
TFA-2030R05-1	TFAN-2030R05-1	20×30	5	BK7	λ	Ground
TFA-2030R05-4	TFAN-2030R05-4	20×30	5	BK7	λ/4	Ground
TFA-2030R05-10	TFAN-2030R05-10	20×30	5	BK7	λ/10	Ground
TFA-2030R05-20	TFAN-2030R05-20	20×30	5	BK7	λ/20	Ground
TFAQ-2030R06-20	TFAQN-2030R06-20	20×30	6	Synthetic fused silica	λ/20	Ground
TFA-2535R05-1	TFAN-2535R05-1	25×35	5	BK7	λ	Ground
TFA-2535R05-4	TFAN-2535R05-4	25×35	5	BK7	λ/4	Ground
TFA-2535R05-10	TFAN-2535R05-10	25×35	5	BK7	λ/10	Ground
TFA-2535R05-20	TFAN-2535R05-20	25×35	5	BK7	λ/20	Ground
TFAQ-2535R06-20	TFAQN-2535R06-20	25×35	6	Synthetic fused silica	λ/20	Ground
TFA-3040R06-1	TFAN-3040R06-1	30×40	6	Hard glass	λ	Polished
TFA-3040R06-4	TFAN-3040R06-4	30×40	6	Hard glass	λ/4	Polished
TFA-3040R06-10	TFAN-3040R06-10	30×40	6	Hard glass	λ/10	Polished
TFA-3040R06-20	TFAN-3040R06-20	30×40	6	Hard glass	λ/20	Polished
TFAQ-3040R08-20	TFAQN-3040R08-20	30×40	8	Hard glass	λ/20	Polished
TFA-4050R08-1	TFAN-4050R08-1	40×50	8	Hard glass	λ	Polished
TFA-4050R08-4	TFAN-4050R08-4	40×50	8	Hard glass	λ/4	Polished
TFA-4050R08-10	TFAN-4050R08-10	40×50	8	Hard glass	λ/10	Polished
TFA-4050R08-20	TFAN-4050R08-20	40×50	8	Hard glass	λ/20	Polished
TFA-5060R10-1	TFAN-5060R10-1	50×60	10	Hard glass	λ	Polished
TFA-5060R10-4	TFAN-5060R10-4	50×60	10	Hard glass	λ/4	Polished
TFA-5060R10-10	TFAN-5060R10-10	50×60	10	Hard glass	λ/10	Polished
TFA-5060R10-20	TFAN-5060R10-20	50×60	10	Hard glass	λ/20	Polished
TFA-6080R12-1	TFAN-6080R12-1	60×80	12	Hard glass	λ	Polished
TFA-6080R12-4	TFAN-6080R12-4	60×80	12	Hard glass	λ/4	Polished
TFA-6080R12-10	TFAN-6080R12-10	60×80	12	Hard glass	λ/10	Polished
TFA-6080R12-20	TFAN-6080R12-20	60×80	12	Hard glass	λ/20	Polished
TFA-80100R15-1	TFAN-80100R15-1	80×100	15	Hard glass	λ	Polished
TFA-80100R15-4	TFAN-80100R15-4	80×100	15	Hard glass	λ/4	Polished
TFA-80100R15-10	TFAN-80100R15-10	80×100	15	Hard glass	λ/10	Polished

High Parallelism						
Part Number	Diameter φD [mm]	Thickness t [mm]	Material	Surface Flatness	Rear Surface	
OPBA-10C05-10	φ10	5	BK7	λ/10	Polished	
OPBA-15C05-10	φ15	5	BK7	λ/10	Polished	
OPBA-20C05-10	φ20	5	BK7	λ/10	Polished	
OPBA-25C05-10	φ25	5	BK7	λ/10	Polished	
OPBA-30C05-10	φ30	5	BK7	λ/10	Polished	
OPBA-40C06-10	φ40	6	BK7	λ/10	Polished	
OPBA-50C08-10	φ50	8	BK7	λ/10	Polished	
OPBA-60C10-10	φ60	10	BK7	λ/10	Polished	
OPSQA-10C05-10	φ10	5	Synthetic fused silica	λ/10	Polished	
OPSQA-15C05-10	φ15	5	Synthetic fused silica	λ/10	Polished	
OPSQA-20C05-10	φ20	5	Synthetic fused silica	λ/10	Polished	
OPSQA-25C05-10	φ25	5	Synthetic fused silica	λ/10	Polished	
OPSQA-30C05-10	φ30	5	Synthetic fused silica	λ/10	Polished	

Application
SystemsOptics &
Optical
CoatingsOpto-
Mechanics

Bases

Manual
StagesActuators &
AdjustersMotorized
StagesLight Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Large Aluminum Mirrors | TFAEFL

RoHS

Catalog
Code

W3177

Application
SystemsOptics &
Optical
CoatingsOpto-
Mechanics

Bases

Manual
StagesActuators &
AdjustersMotorized
StagesLight Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband


Dielectric Coating

Aluminum Coating


Gold Coating

For applications requiring large aluminum mirrors, standard catalog products of 200mm square are available. Custom larger sizes are available upon request.

- For visible and near-infrared light applications.
- For large aperture optical system.

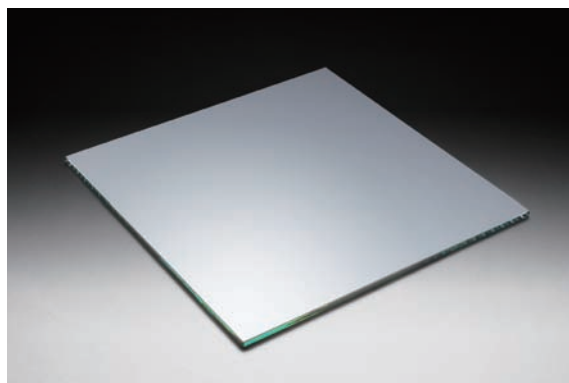


Schematic

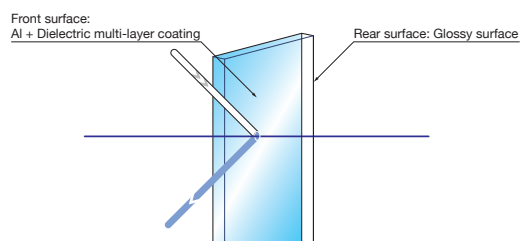

Outline Drawing

(in mm)



● Tolerance
Length A ± 0.3
Chamfer C0.6 – C1

Specifications

Material	Float glass (Soda-Lime glass)
Coating	Al + Dielectric multi-layer coating
Clear aperture	90% of Actual Aperture
Rear surface	Glossy surface
Surface Quality (Scratch-Dig)	60–40

Guide

- ▶ Please contact our Sales Team for customized products.
- ▶ Holders to mount the mirrors are available, please contact our Sales Team to assist your selection.

Attention

- ▶ The mirrors are supplied with a protective film attached to the coated surface. Before use, please remove the protective film.
- ▶ When a laser light is transmitted with multiple mirrors installed there will be a large amount of light loss due to the absorption of the aluminium coating. Please consider using dielectric multi-layer mirrors (TFM) for improved performance.


Specifications

Part Number	Wavelength Range [nm]	Reflectance	Length A [mm]	Surface Flatness
TFAEFL-200S06-P	400 – 700	> average 90	200	4 – 6λ (Within $\phi 25.4$)
TFAEFL-250S06-P	400 – 700	> average 90	250	4 – 6λ (Within $\phi 25.4$)
TFAEFL-300S06-P	400 – 700	> average 90	300	4 – 6λ (Within $\phi 25.4$)


Typical Reflectance Data

R: Reflectance

400 – 700nm

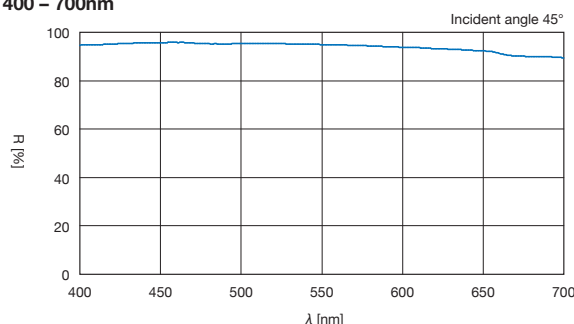

200 – 1200nm

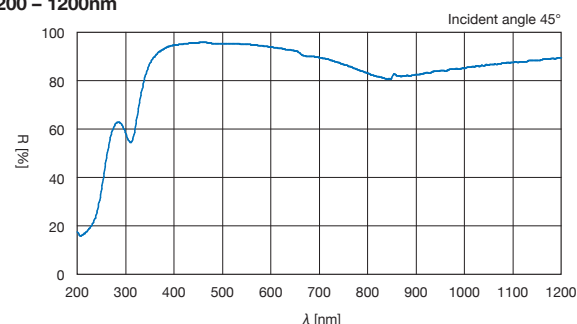


An economic general use mirror suitable for an illumination optical system and a simple experiments. It has the same reflectance and surface flatness as our aluminum mirrors (TFA) designed for use with a laser, but lower surface quality.

- The dirt on the surface of the mirror can be wiped because the scratch-resistant protection is coated on the aluminum coating.
- Reflectance of less variation can be obtained in a wide wavelength range from visible to near-infrared.




Schematic

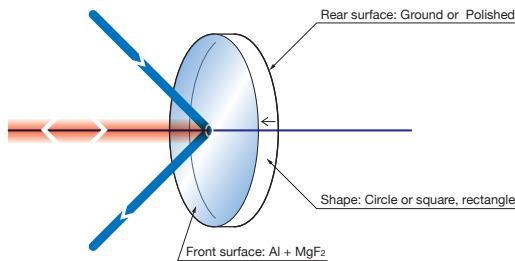


Outline Drawing

(in mm)

● Circle



● Square / Rectangle



- Tolerance
Diameter $\phi D_{-0.1}^{+0}$
Length $A_{-0.1}^{+0}, B_{-0.1}^{+0}$
Thickness $t \pm 0.1$

Circle

Part Number	Diameter ϕD [mm]	Thickness t [mm]	Surface flatness	Rear surface
S-TFA-10C03-10	$\phi 10$	3	$\lambda/10$	Ground
S-TFA-10C05-10	$\phi 10$	5	$\lambda/10$	Ground
S-TFA-15C03-10	$\phi 15$	3	$\lambda/10$	Ground
S-TFA-15C05-10	$\phi 15$	5	$\lambda/10$	Ground
S-TFA-20C03-10	$\phi 20$	3	$\lambda/10$	Ground
S-TFA-20C05-10	$\phi 20$	5	$\lambda/10$	Ground
S-TFA-25C05-1	$\phi 25$	5	λ	Polished
S-TFA-25C05-10	$\phi 25$	5	$\lambda/10$	Polished
S-TFA-30C05-1	$\phi 30$	5	λ	Polished
S-TFA-30C05-10	$\phi 30$	5	$\lambda/10$	Polished
S-TFA-40C06-1	$\phi 40$	6	λ	Polished
S-TFA-40C06-10	$\phi 40$	6	$\lambda/10$	Polished
S-TFA-50C08-1	$\phi 50$	8	λ	Polished
S-TFA-50C08-10	$\phi 50$	8	$\lambda/10$	Polished

Specifications

Material	BK7
Coating	Al + MgF ₂
Parallelism	<3'
Incident angle	45°
Laser Damage Threshold	0.25J/cm ² (pulse width 10ns, repetition frequency 20Hz)
Surface Quality (Scratch-Dig)	60-40
Clear aperture	90% of actual aperture or circle or ellipse that contacts 90% square of dimension


Attention

- ▶ When a laser is transmitted with multiple mirrors installed, there will be loss of a large amount of light caused by the absorption of the aluminum coating. Please switch to dielectric multi-layer mirrors (TFM) for improved performance.
- ▶ Reflectance specification is represented by the average of the reflectance of P polarized light and S polarized light. Reflectance may vary depending on the polarization state of the incident beam.


Typical Reflectance Data

R: Reflectance

100 – 1200nm

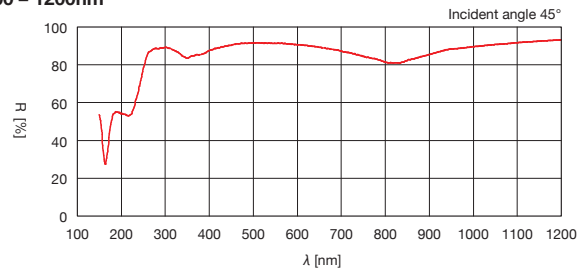

150 – 700nm (enlarged graph)

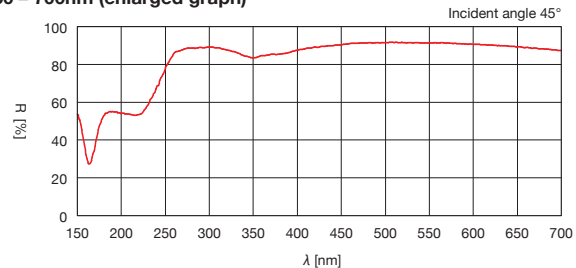

Square / Rectangle

Part Number	Length A × B [mm]	Thickness t [mm]	Surface flatness	Rear surface
S-TFA-10S03-10	10×10	3	$\lambda/10$	Ground
S-TFA-15S03-10	15×15	3	$\lambda/10$	Ground
S-TFA-20S03-10	20×20	3	$\lambda/10$	Ground
S-TFA-20S05-4	20×20	5	$\lambda/4$	Ground
S-TFA-20S05-10	20×20	5	$\lambda/10$	Ground
S-TFA-25S05-10	25×25	5	$\lambda/10$	Ground
S-TFA-30S05-1	30×30	5	λ	Ground
S-TFA-30S05-10	30×30	5	$\lambda/10$	Ground
S-TFA-1015R03-10	10×15	3	$\lambda/10$	Ground
S-TFA-1015R05-10	10×15	5	$\lambda/10$	Ground
S-TFA-1525R03-10	15×25	3	$\lambda/10$	Ground
S-TFA-1525R05-10	15×25	5	$\lambda/10$	Ground
S-TFA-2030R05-10	20×30	5	$\lambda/10$	Ground
S-TFA-2535R05-10	25×35	5	$\lambda/10$	Ground

Compatible Optic Mounts

MHG-HS25-NL, -HS30-NL / MHG-MP50-NL / MAD-30-10 + MHL-30S / BSHL-15-2 / MHF-20 / MHAN-40S

Ellipsoidal mirror | TCEA

RoHS

Catalog
Code

W3179

Application
SystemsOptics &
Optical
CoatingsOpto-
Mechanics

Bases

Manual
StagesActuators &
AdjustersMotorized
StagesLight Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating


In general, an ellipsoid has two focal points and the light that passes through one focal point also passes through the other focal point after being reflected by the elliptical surface. By using this principle, if one light source is put on one focal point, it is possible to collect light at the other focal point.

It is used to incident the light of the lamp into optical fiber or light guide.

- It obtains high performance condensing by precision aspheric surface processing.
- It can provide long-term stability because it has a protective scratch-resistant coating over aluminum.
- Customer can select a mirror to suit specifications from among the wide variety of products which are classified in the focal position and outer diameter.




Schematic

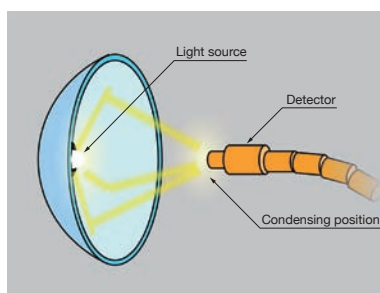

Outline Drawing

(in mm)

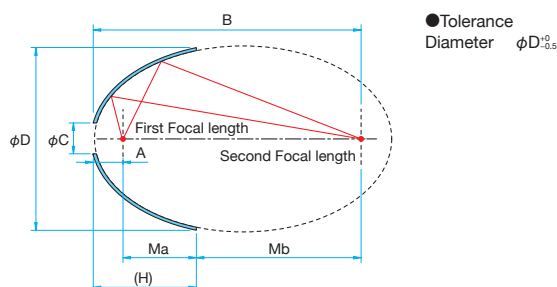

Specifications

Material	Tempax®
Coating	Al + SiO ₂

Tempax® is a registered trademark of SCHOTT AG company.

Guide


- ▶ Different focal length, outer diameter and hole sizes not mentioned on-line or in our catalog are available as a custom product upon request.
- ▶ It is also available for parabolic TCPA mirror, to project the light from the first focal point to infinity. [Reference](#) B037

Attention

- ▶ The focus is not available on the second focal point when using a light source with directivity, because the light is not reflected by the mirror surface.
- ▶ Brightness distribution if away from the second focal point, may result in the distribution of ring-shaped.

Typical Reflectance Data

R: Reflectance

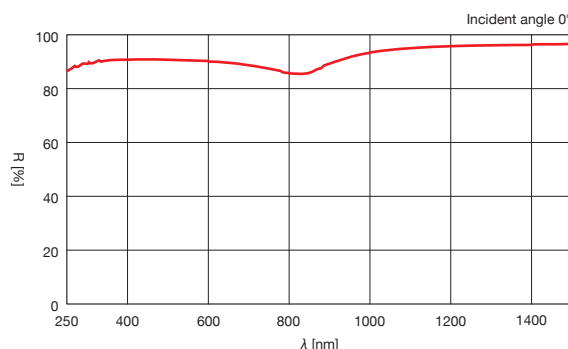

Specifications

Part Number	Dimension φD [mm]	Thickness* H [mm]	Hole dimension φC [mm]	Ma [mm]	Mb [mm]	First Focal length A [mm]	Second Focal length B [mm]
TCEA-64C-11/78-SH18	φ64	44	φ18	31	36	11	78
TCEA-76C-13.5/120-SH18	φ76	42	φ18	25	81.5	13.5	120
TCEA-86C-14/134-SH20	φ86	46	φ20	32	88	14	134
TCEA-105C-22/145-SH27	φ105	44	φ27	20	103	22	145
TCEA-113C-17/272-SH27	φ113	54	φ27	36	219	17	272
TCEA-124C-23/195-SH25	φ124	56.5	φ25	32.6	139.4	23	195
TCEA-128C-18/288-SH31	φ128	67	φ31	50	220	18	288
TCEA-148C-28/252-SH30	φ148	63	φ30	34.6	189.4	28	252

* The thickness "H" is design value and there is a possibility of individual variability in the actual product. It is Not guaranteed value.


Paraboloid mirror is a curved mirror that converts diverging light from a point of light source into parallel light.

By making the paraboloid a curved surface, it is possible to retrieve parallel light more efficiently than a spherical concave mirror. An example use of paraboloid mirror is as a lamp reflector of a microscope.

- It obtains high performance condensing by precision aspheric surface processing.
- It can provide long-term stability because it has a protective scratch-resistant coating over aluminum.
- It is easy to position the light source at the focusing point because there is a hole on the axis of the paraboloid.
- By entering the thick parallel light, it allows the light to be collected at one point.




Schematic

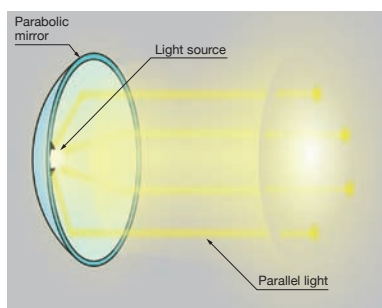

Outline Drawing

(in mm)



- Tolerance
- Diameter $\phi D_{\pm 0.5}$
- Hole diameter $\phi C_{\pm 0.5}$
- Focal length $\pm 1\%$

Specifications

Material	Tempax®
Coating	Al + SiO ₂

Tempax® is a registered trademark of SCHOTT AG company.

Guide


- ▶ Different focal length, outer diameter and hole sizes not mentioned on-line or in our catalog are available as a custom product upon request.
- ▶ Also available for ellipsoidal TCEA mirror for focusing light of the lamp at one point. [Reference](#) B036

Attention

- ▶ Light does not reach to the mirror surface when high directivity source is placed at focal point, so it is not available to get the effect of paraboloid mirror.
- ▶ Light near the optical axis center is not reflected by the hole in the mirror, there is a case that intensity distribution of the parallel light becomes ring-shaped.
- ▶ When focusing the light emitted from a paraboloid mirror by a lens, it does not focus at one point by the influence of light incident on the lens directly from the lamp.

Typical Reflectance Data

R: Reflectance

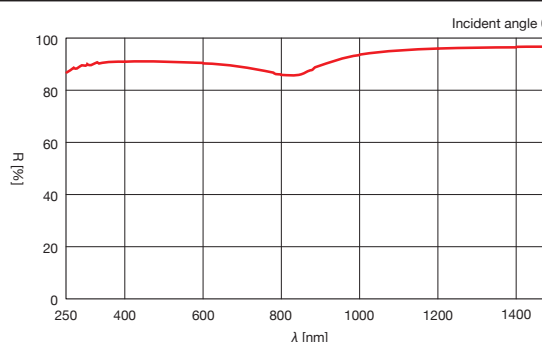

Specifications

Part Number	Dimension ϕD [mm]	Focal length f [mm]	Thickness* H [mm]	Hole dimension ϕC [mm]
TCPA-100C-12.5-SH18	$\phi 100$	12.5	46	$\phi 18$
TCPA-105C-15-SH23	$\phi 105$	15	42	$\phi 23$
TCPA-152C-17-SH30	$\phi 152$	17	76.5	$\phi 30$
TCPA-152C-30-SH35	$\phi 152$	30	44.5	$\phi 35$


* The thickness "H" is design value and there is a possibility of individual variability in the actual product. It is not guaranteed value.

Gold Flat Mirrors | TFG/TFGS


RoHS

Gold (Au) coated reflection mirrors have high reflectance over wide infrared range.

- Chromium (Cr) is used as the undercoated to better reinforce the adhesion of gold to the substrate.
- Gold mirrors with silicon substrates have higher durability than glass because gold coating adheres much stronger to silicon and has a higher thermal conductivity. (thermal conductivity of silicon is 111 times better compared to glass)

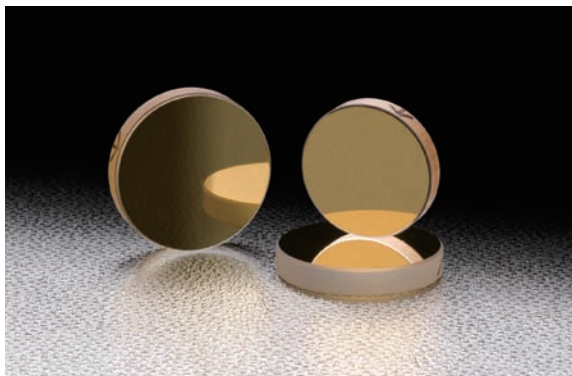


Schematic

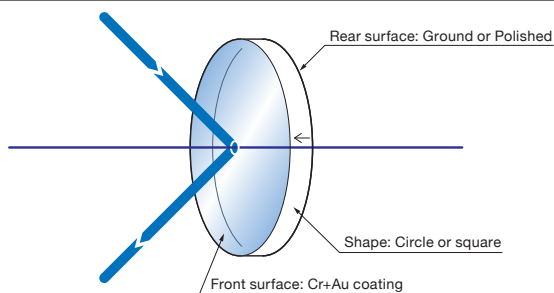

Outline Drawing


(in mm)

●Circle




●Tolerance
Diameter $\phi D_{-0.1}^{+0.1}$
Thickness $t \pm 0.1$

●Square



●Tolerance
Length $A_{-0.1}^{+0.1}$
Thickness $t \pm 0.1$

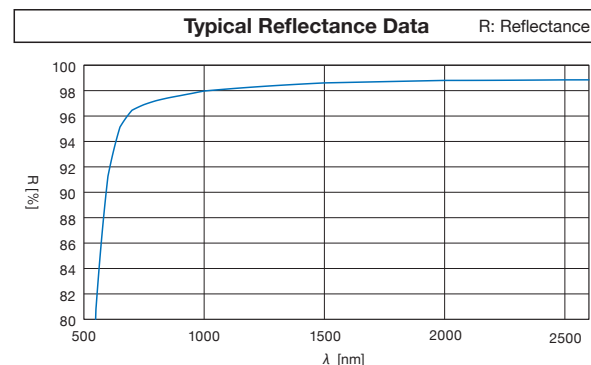

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Gold Flat Mirrors

Circle						
Part Number	Dimension ϕD [mm]	Thickness t [mm]	Surface Flatness		Material	Rear Surface
			(at 632.8nm)	(at 10.6 μ m)		
TFG-20C05-10	$\phi 20$	5	$\lambda/10$	$\lambda/160$	BK7	Ground
TFG-25C05-10	$\phi 25$	5	$\lambda/10$	$\lambda/160$	BK7	Polished
TFG-30C05-10	$\phi 30$	5	$\lambda/10$	$\lambda/160$	BK7	Polished
TFG-40C06-10	$\phi 40$	6	$\lambda/10$	$\lambda/160$	BK7	Polished
TFG-50C08-10	$\phi 50$	8	$\lambda/10$	$\lambda/160$	BK7	Polished

Square						
Part Number	Length A [mm]	Thickness t [mm]	Surface Flatness		Material	Rear Surface
			(at 632.8nm)	(at 10.6 μ m)		
TFG-20S05-10	$\square 20$	5	$\lambda/10$	$\lambda/160$	BK7	Ground
TFG-25S05-10	$\square 25$	5	$\lambda/10$	$\lambda/160$	BK7	Ground
TFG-30S05-10	$\square 30$	5	$\lambda/10$	$\lambda/160$	BK7	Ground
TFG-50S08-10	$\square 50$	8	$\lambda/10$	$\lambda/160$	Hard glass	Polished

Gold Silicon Mirrors

Circle						
Part Number	Dimension ϕD [mm]	Thickness t [mm]	Surface Flatness		Material	Rear Surface
			(at 632.8nm)	(at 10.6 μ m)		
TFGS-30C03-2	$\phi 30$	3	λ	$\lambda/16$	Silicon crystal	Ground
TFGS-40C04-2	$\phi 40$	4	λ	$\lambda/16$	Silicon crystal	Ground
TFGS-50C05-2	$\phi 50$	5	λ	$\lambda/16$	Silicon crystal	Ground

Compatible Optic Mounts

MHG-HS25, -HS30 / MHG-MP50 / MHF-20 / MHAN-40M

Application
SystemsOptics &
Optical
CoatingsOpto-
Mechanics

Bases

Manual
StagesActuators &
AdjustersMotorized
StagesLight Sources &
Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating


Silver (Ag) coated mirrors have high reflectance over a broad range from visible to infrared wavelengths.

Since it is coated with a protective layer on the silver, it can be used long-term without oxidation.

- For the wavelength range from the visible to infrared, higher reflectance than aluminum mirror can be obtained.
- Incident dependence is smaller than the dielectric multilayer coating, it can use at various incident angles.
- Since it is coated by protective layer, a scratch hardly occurs even if it is rubbed with a cloth.




Schematic

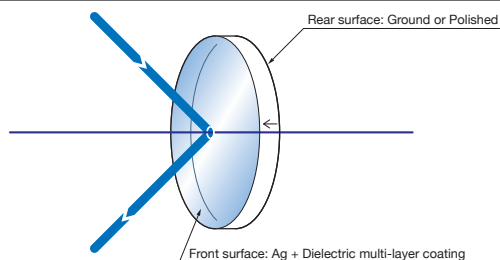

Outline Drawing

(in mm)



● Tolerance
Diameter $\phi D_{\pm 0.5}$
Thickness $t \pm 0.1$

Specifications

Part Number	Diameter ϕD [mm]	Thickness t [mm]	Rear Surface
TFAG-12.7C05-10	$\phi 12.7$	5	Ground
TFAG-25.4C05-10	$\phi 25.4$	5	Polished
TFAG-30C05-10	$\phi 30$	5	Polished
TFAG-50C08-10	$\phi 50$	8	Polished
TFAG-50.8C08-10	$\phi 50.8$	8	Polished

Specifications

Material	BK7
Coating	Ag + Dielectric multi-layer coating
Wavelength Range	450 – 2000nm
Reflectance	> average 97.5%
Surface Flatness	$\lambda/10$
Parallelism	<3'
Surface Quality (Scratch-Dig)	40–20
Clear aperture	90% of Actual Aperture

Guide


- Please contact our Sales Division with your customized products requests.

Attention

- For long-term storage, please use a de-oxidizer to prevent the oxidation of the silver.
- When a laser is transmitted with multiple mirrors installed, there will be a loss of the amount of light caused by the absorption of the silver coating. Please use 0-45° Wide incidence dielectric mirrors (TFVM) for improved performance. [Reference](#) B027
- Reflectance specification is represented by the average of the reflectance of P polarized light and S polarized light. Reflectance may vary depending on the polarization state of the incident beam.

Typical Reflectance Data

R: Reflectance

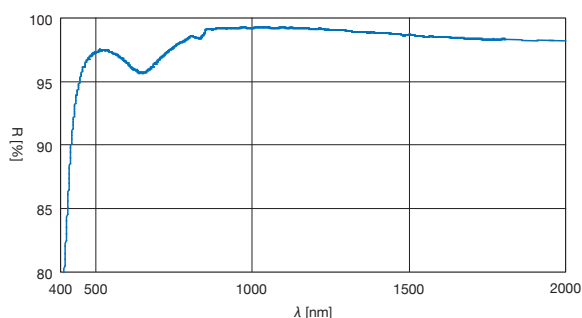

Contact sheet for Special Order for Mirror

☐ Estimation ☐ Order

Date

☐ To: Sigma Koki Co., Ltd. **FAX +81-3-5638-6550**

Affiliation (Organization Name)					
Department		Name			
TEL		FAX		E-mail	
Country/Address					
Name & Designation (Tentative name is okay)					
Drawing Number		Estimate		<input type="checkbox"/> Yes: by Date <input type="checkbox"/> No	
Desired Delivery Date		Budget		JP Yen	
Substrates		If you are using a substrate of standard product, please fill in the product number. * If you specify a standard product of the substrate, it is not necessary to fill in fields marked with ▲.			
Material▲		<input type="checkbox"/> BK7 <input type="checkbox"/> Synthetic fused silica <input type="checkbox"/> Hard Glass <input type="checkbox"/> Other ()			
Quantity		Laser Damage Threshold▲ (at $\lambda = 632.8\text{nm}$)			
Rear Surface▲		<input type="checkbox"/> Ground <input type="checkbox"/> Polished <input type="checkbox"/> No object		Parallelism▲ (enter only when it is necessary)	
Dimensions▲ If you do not specify a dimension tolerance is outside the standard tolerance.			ϕA		mm
			a		mm
			b		mm
			t		mm
Specifications of Total Reflection Coat Select metallic coating or dielectric multi-layer coating.		<input type="checkbox"/> Metallic Coating <input type="checkbox"/> Dielectric multi-layer coating			
		<input type="checkbox"/> Al only <input type="checkbox"/> Al + MgF ₂ <input type="checkbox"/> Al + SiO <input type="checkbox"/> Al + Dielectric coating <input type="checkbox"/> Ag + Dielectric coating <input type="checkbox"/> Cr + Au <input type="checkbox"/> Pt <input type="checkbox"/> Other ()			
		Wavelength Range	$\lambda =$ nm	Incident angle	$\theta =$ ° ± °
Specifications of Light Source Used	Wavelength Used	$\lambda =$ nm	Type		
	Output or Energy	W	Beam size	mm	
		J	Pulse width	s	Repetition frequency Hz
	Incident angle	$\theta =$ °			
		Polarization Conditions (If nothing is specified, circular polarized light or 45° direction of linearly polarization are set.)			
Other * Write more detailed specifications here. (Rough illustration is acceptable.)					

Sigma Koki Co., Ltd.

General Catalog 02

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Contact sheet for laser cavity mirror

☐ Estimation ☐ Order

Date

☐ To: Sigma Koki Co., Ltd. **FAX +81-3-5638-6550**

Affiliation (Organization Name)										
Department		Name								
TEL		FAX		E-mail						
Country/Address										
Name & Designation (Tentative name is okay)										
Drawing Number			Estimate	<input type="checkbox"/> Yes: by Date <input type="checkbox"/> No						
Desired Delivery Date			Budget	JP Yen						
Substrates			If you are using a substrate of standard product, please fill in the product number. * If you specify a standard product of the substrate, it is not necessary to fill in fields marked with ▲.							
Material▲ <input type="checkbox"/> BK7 <input type="checkbox"/> Synthetic fused silica <input type="checkbox"/> Other ()										
Quantity										
Dimensions▲ If you do not specify a dimension tolerance is outside the standard tolerance.	Flat Mirror Type		* The back is basically a polished surface.		ϕA	mm				
					t	mm				
		Laser Damage Threshold▲ (at λ = 632.8nm)								
				Parallelism▲ (enter only when it is necessary)						
	Concave Mirror Type		* The back is basically a polished surface.		ϕA	mm				
					te	mm				
					tc	mm				
					r	mm				
Standard Curvature Radius [mm]		10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100, 120, 150, 200, 250, 300, 400, 500, 600, 700, 800, 1000, 1500, 2000, 2500, 3000, 4000, 5000, 10000, 20000, 30000 (Caution) In other than the above curvature radius, tooling costs may be required.								
Specifications of Coating	Dielectric multi-layer coating	Wavelength Used	λ =	nm	Incident angle	θ =	°± °	Reflectance	R =	% or more
		Reflective Coating	λ = for nm							

Sigma Koki Co., Ltd.

General Catalog 02

Concave Mirror
(rear mirror)Flat Mirror
(output mirror)

Laser cavity mirrors for the laser oscillator used in coating technology and high-quality high-precision polishing technology are required. In accordance with the specifications received from customers, we manufacture high quality mirror cavity with a high degree of accuracy. We will propose to use a substrate such as a mirror that has been standardized, the method that best meets your budget. To confirm the specifications for the quotation, we may contact to the customer.

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating