

X Axis Aluminum Translation Stages

XY Axis Aluminum Translation Stages

TADC-251

Stage Size 25 x 25 mm

RoHS

TADC-252W

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Others

15 x 15 mm

25 x 25 mm

40 x 40 mm

60 x 60 mm

65 x 65 mm

80 x 80 mm


100 x 100 mm

120 x 120 mm

Others

Aluminum translation stage with high stiffness bearing ways. Cost effective and light weight.

- Unique steel bearing ways with 4-point extended contact yield stable load capacity in all directions.
- Long life, maintenance free.

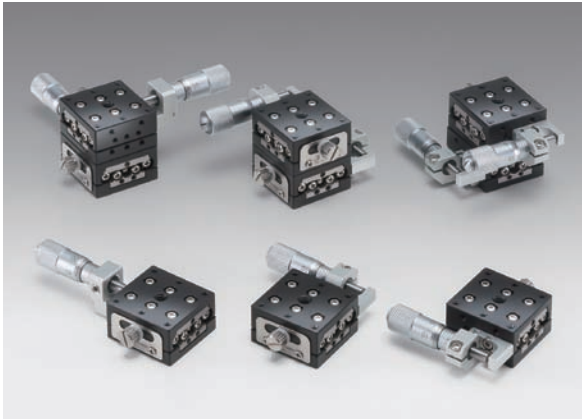

Attention

- ▶ Micrometer brackets may extend above the top surface of some stages. Check drawings for more information.


Specifications					
Part Number		TADC-251C	TADC-251S	TADC-252WC	TADC-252WS
(Opposite Model)		—	TADC-251SR	—	TADC-252WSR
Stage Size [mm]		25x25	25x25	25x25	25x25
Axes of Travel		X axis		XY axis	
Micrometer Position		Center	Side	Center	Side
Travel [mm]		±3	±3	±3	±3
Lead of Actuator [mm/rotation]		0.5	0.5	0.5	0.5
Micrometer Readable Resolution [mm]		0.01	0.01	0.01	0.01
Guide Method		Extended contact ball bearing guide			
Primary Material		Aluminum			
Finish		Black anodized			
Load Capacity [N]		39.2 (4.0kgf)	39.2 (4.0kgf)	39.2 (4.0kgf)	39.2 (4.0kgf)
Travel Accuracy	Straightness [μm]	3	3	3	3
	Pitch [N·m]	2	2	1.9	1.9
	Roll [N·m]	1.9	1.9	1.9	1.9
Max. Moment Capacity	Yaw [N·m]	1.9	1.9	1.9	1.9
	Pitch [°/N·cm]	2.5	2.5	4.5	4.5
Moment Stiffness	Roll [°/N·cm]	2.5	2.5	4.5	4.5
	Parallelism [μm]	30	30	60	60
Running Parallelism [μm]		10	10	20	20
Orthogonality [μm]		—	—	10	10
Weight [kg]		0.05	0.05	0.1	0.1



Outline Drawing


TADC-251C

Hexagon socket head cap screw (stainless steel construction) M2x4...4 screws

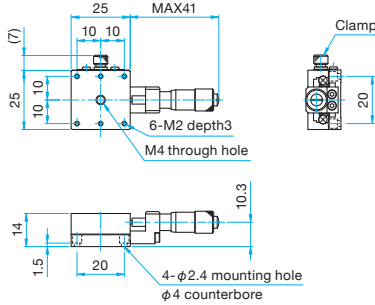


TADC-251S

Hexagon socket head cap screw (stainless steel construction) M2x4...4 screws

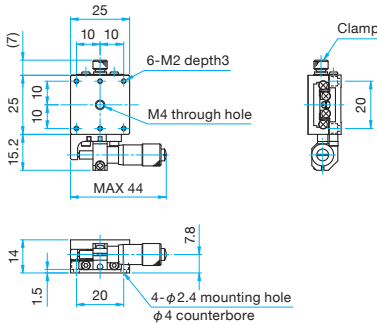


TADC-251SR

Hexagon socket head cap screw (stainless steel construction) M2x4...4 screws

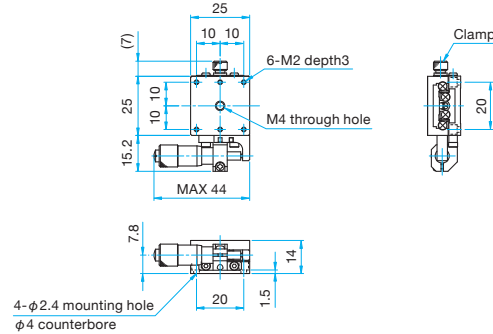


TADC-252WC

Hexagon socket head cap screw (stainless steel construction) M2x4...4 screws

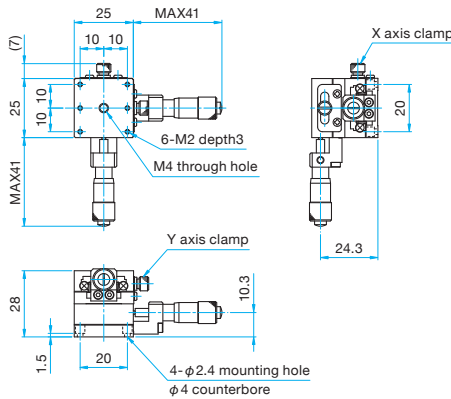


TADC-252WS

Hexagon socket head cap screw (stainless steel construction) M2x4...4 screws

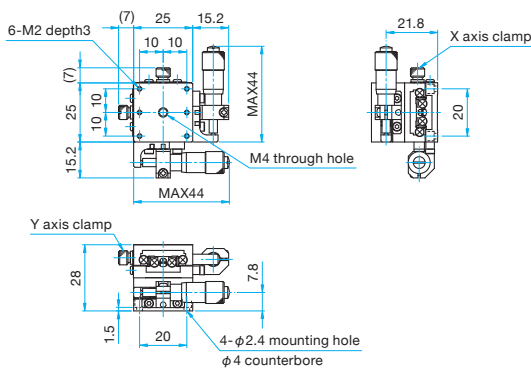

TADC-252WSR

Hexagon socket head cap screw (stainless steel construction) M2x4...4 screws

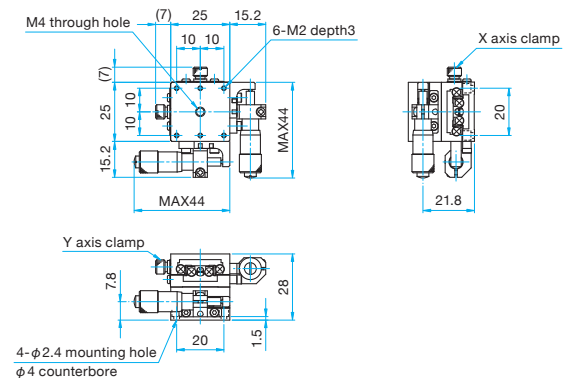

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Ohters

15 x 15 mm

25 x 25 mm

40 x 40 mm

60 x 60 mm

65 x 65 mm

80 x 80 mm

100 x 100 mm

120 x 120 mm

Others

X Axis Aluminum Translation Stages

XY Axis Aluminum Translation Stages

TADC-401


TADC-402W

Stage Size 40 x 40 mm

RoHS

Aluminum translation stage with high stiffness bearing ways. Cost effective and light weight.

- Unique steel bearing ways with 4-point extended contact yield stable load capacity in all directions.
- Long life, maintenance free.

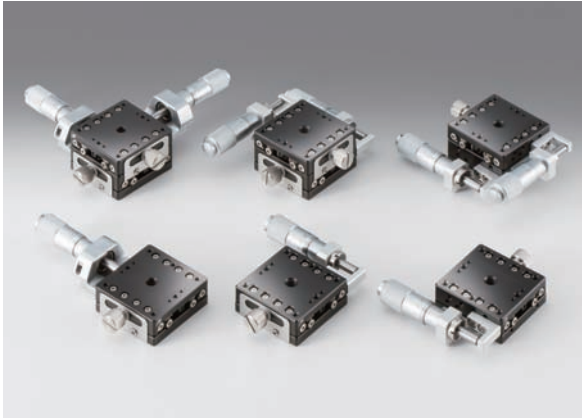

Attention

- ▶ Micrometer brackets may extend above the top surface of some stages. Check drawings for more information.

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Others

15 x 15 mm

25 x 25 mm

40 x 40 mm

60 x 60 mm

65 x 65 mm

80 x 80 mm

100 x 100 mm

120 x 120 mm

Others

Specifications


Part Number	METRIC	TADC-401C	TADC-401S	TADC-402WC	TADC-402WS
	INCH	TADC-401CUU	TADC-401SUU	TADC-402WCUU	TADC-402WSUU
(Opposite Model)	METRIC	—	TADC-401SR	—	TADC-402WSR
	INCH	—	TADC-401SRUU	—	TADC-402WSRUU
Stage Size [mm]		40x40	40x40	40x40	40x40
Axes of Travel		X axis		XY axis	
Micrometer Position		Center	Side	Center	Side
Travel [mm]		±6.5	±6.5	±6.5	±6.5
Lead of Actuator [mm/rotation]		0.5	0.5	0.5	0.5
Micrometer Readable Resolution [mm]		0.01	0.01	0.01	0.01
Guide Method		Extended contact ball bearing guide			
Primary Material		Aluminum			
Finish		Black anodized			
Load Capacity [N]		49 (5.0kgf)	49 (5.0kgf)	49 (5.0kgf)	49 (5.0kgf)
Travel Accuracy	Straightness [μm]	3	3	3	3
	Pitch [N·m]	2.5	2.5	2.5	2.5
	Roll [N·m]	3	3	2.5	2.5
	Yaw [N·m]	2.5	2.5	2.5	2.5
Moment Stiffness	Pitch [°/N·cm]	0.66	0.66	1.22	1.22
	Roll [°/N·cm]	0.36	0.36	1.22	1.22
Parallelism [μm]		30	30	50	50
Running Parallelism [μm]		10	10	20	20
Orthogonality [μm]		—	—	10	10
Weight [kg]		0.15	0.15	0.3	0.3



Outline Drawing

TADC-401C/401CUU


Hexagon socket head cap screw (stainless steel construction) M3x6...4 screws, Spring washers
Hexagon socket head cap screw (stainless steel construction) 6-32UNCx1/4...4 screws (UU)

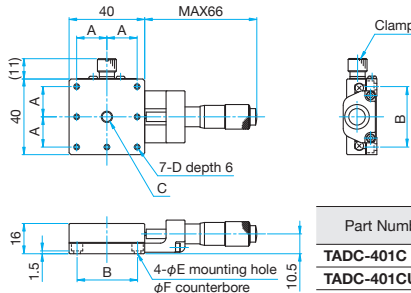

Part Number	A (mm)	B (mm)	C	D	E (mm)	F (mm)
TADC-401C	16	32	M6 P1 depth 5	M3	3.5	6
TADC-401CUU	15.875	31.75	1/4-20UNC depth 5	6-32UNC	4	6.5

TADC-401S/401SUU


Hexagon socket head cap screw (stainless steel construction) M3x6...4 screws, Spring washers
Hexagon socket head cap screw (stainless steel construction) 6-32UNCx1/4...4 screws (UU)

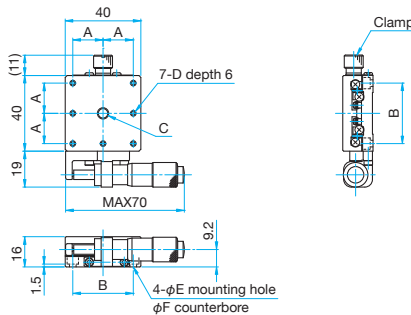

Part Number	A (mm)	B (mm)	C	D	E (mm)	F (mm)
TADC-401S	16	32	M6 P1 depth 5	M3	3.5	6
TADC-401SUU	15.875	31.75	1/4-20UNC depth 5	6-32UNC	4	6.5

TADC-401SR/401SRUU


Hexagon socket head cap screw (stainless steel construction) M3x6...4 screws, Spring washers
Hexagon socket head cap screw (stainless steel construction) 6-32UNCx1/4...4 screws (UU)

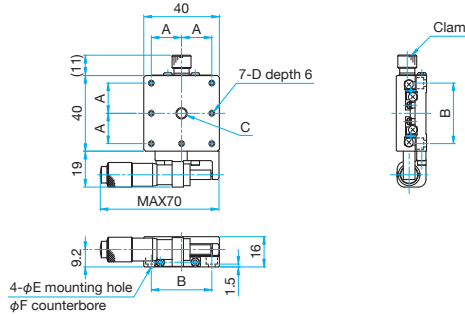

Part Number	A (mm)	B (mm)	C	D	E (mm)	F (mm)
TADC-401SR	16	32	M6 P1 depth 5	M3	3.5	6
TADC-401SRUU	15.875	31.75	1/4-20UNC depth 5	6-32UNC	4	6.5

TADC-402WC/402WCUU


Hexagon socket head cap screw (stainless steel construction) M3x6...4 screws, Spring washers
Hexagon socket head cap screw (stainless steel construction) 6-32UNCx1/4...4 screws (UU)

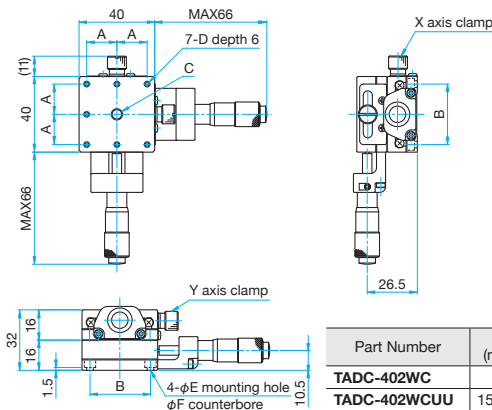

Part Number	A (mm)	B (mm)	C	D	E (mm)	F (mm)
TADC-402WC	16	32	M6 P1 depth 5	M3	3.5	6
TADC-402WCUU	15.875	31.75	1/4-20UNC depth 5	6-32UNC	4	6.5

TADC-402WS/402WSUU


Hexagon socket head cap screw (stainless steel construction) M3x6...4 screws, Spring washers
Hexagon socket head cap screw (stainless steel construction) 6-32UNCx1/4...4 screws (UU)

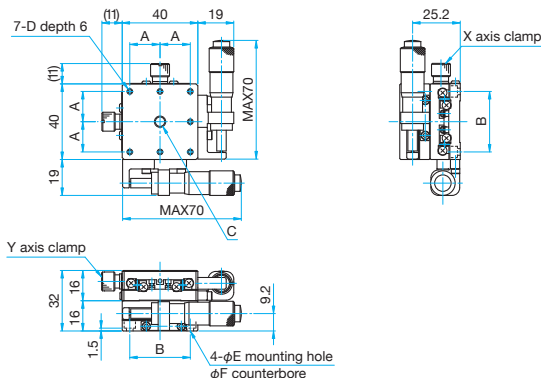

Part Number	A (mm)	B (mm)	C	D	E (mm)	F (mm)
TADC-402WS	16	32	M6 P1 depth 5	M3	3.5	6
TADC-402WSUU	15.875	31.75	1/4-20UNC depth 5	6-32UNC	4	6.5

TADC-402WSR/402WSRUU

Hexagon socket head cap screw (stainless steel construction) M3x6...4 screws, Spring washers
Hexagon socket head cap screw (stainless steel construction) 6-32UNCx1/4...4 screws (UU)

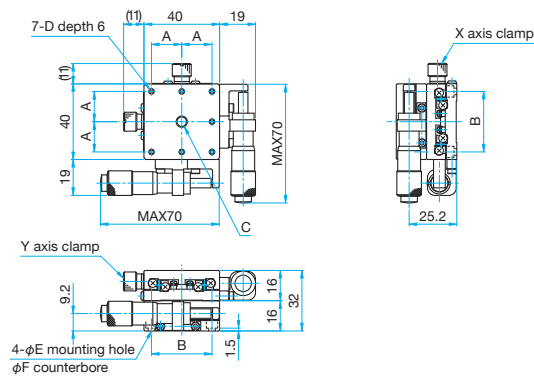

Part Number	A (mm)	B (mm)	C	D	E (mm)	F (mm)
TADC-402WSR	16	32	M6 P1 depth 5	M3	3.5	6
TADC-402WSRUU	15.875	31.75	1/4-20UNC depth 5	6-32UNC	4	6.5

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Ohters

15 × 15 mm

25 × 25 mm

40 × 40 mm

60 × 60 mm

65 × 65 mm

80 × 80 mm

100 × 100 mm

120 × 120 mm

Others

X Axis Aluminum Translation Stages

XY Axis Aluminum Translation Stages

TADC-601

Stage Size 60 × 60 mm

RoHS

TADC-602W

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Others

15 × 15 mm

25 × 25 mm

40 × 40 mm

60 × 60 mm

65 × 65 mm

80 × 80 mm


100 × 100 mm

120 × 120 mm

Others

Aluminum translation stage with high stiffness bearing ways. Cost effective and light weight.

- Unique steel bearing ways with 4-point extended contact yield stable load capacity in all directions.
- Long life, maintenance free.

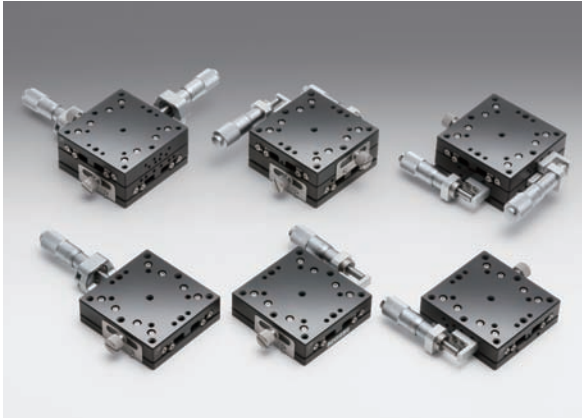

Attention


- ▶ Micrometer brackets may extend above the top surface of some stages. Check drawings for more information.

Specifications					
Part Number	METRIC	TADC-601C	TADC-601S	TADC-602WC	TADC-602WS
(Opposite Model)	METRIC	—	TADC-601SR	—	TADC-602WSR
Stage Size [mm]		60×60	60×60	60×60	60×60
Axes of Travel		X axis		XY axis	
Micrometer Position		Center	Side	Center	Side
Travel [mm]		±6.5	±6.5	±6.5	±6.5
Lead of Actuator [mm/rotation]		0.5	0.5	0.5	0.5
Micrometer Readable Resolution [mm]		0.01	0.01	0.01	0.01
Guide Method		Extended contact ball bearing guide			
Primary Material		Aluminum			
Finish		Black anodized			
Load Capacity [N]		196 (20.0kgf)	196 (20.0kgf)	196 (20.0kgf)	196 (20.0kgf)
Travel Accuracy	Straightness [μm]	3	3	3	3
	Pitch [N·m]	4.9	4.9	4.9	4.9
	Roll [N·m]	4.9	4.9	4.9	4.9
	Yaw [N·m]	4.9	4.9	4.9	4.9
Moment Stiffness	Pitch [°/N·cm]	0.3	0.3	0.6	0.6
	Roll [°/N·cm]	0.25	0.25	0.6	0.6
Parallelism [μm]		30	30	50	50
Running Parallelism [μm]		10	10	20	20
Orthogonality [μm]		—	—	10	10
Weight [kg]		0.2	0.2	0.4	0.4




Outline Drawing


TADC-601C Hexagon socket head cap screw (stainless steel construction) M4x6...4 screws

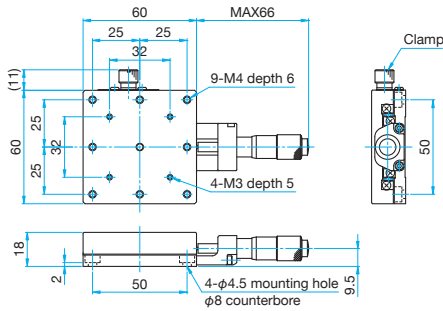


TADC-601S Hexagon socket head cap screw (stainless steel construction) M4x6...4 screws

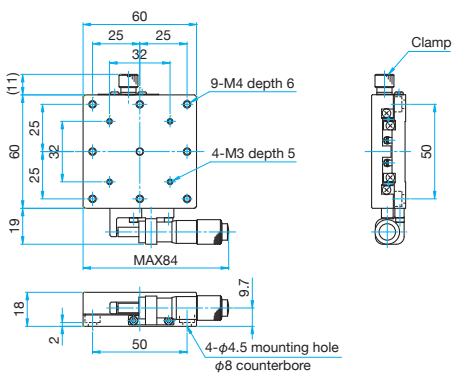


TADC-601SR Hexagon socket head cap screw (stainless steel construction) M4x6...4 screws

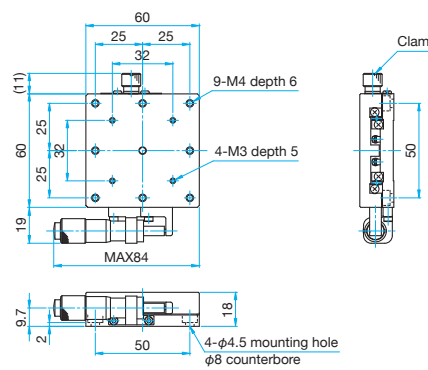


TADC-602WC Hexagon socket head cap screw (stainless steel construction) M4x6...4 screws

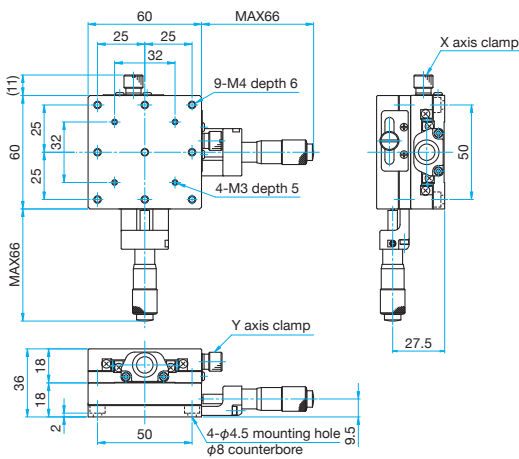

TADC-602WS Hexagon socket head cap screw (stainless steel construction) M4x6...4 screws

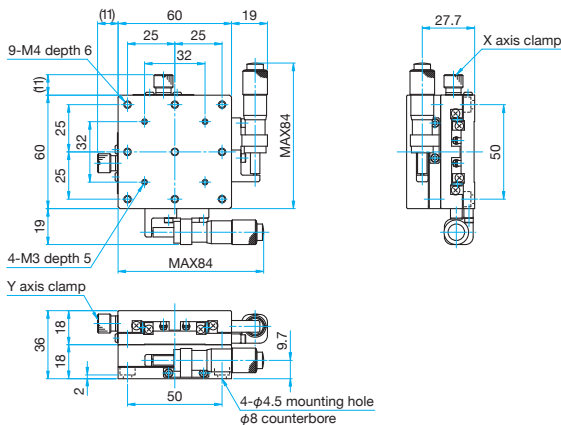

TADC-602WSR Hexagon socket head cap screw (stainless steel construction) M4x6...4 screws

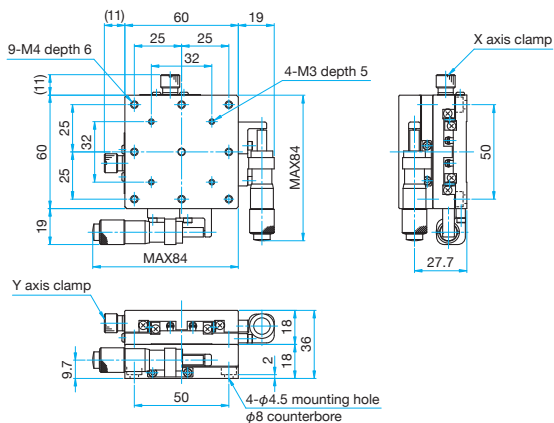

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Others

15 × 15 mm

25 × 25 mm

40 × 40 mm

60 × 60 mm

65 × 65 mm

80 × 80 mm

100 × 100 mm

120 × 120 mm

Others

X Axis Aluminum Translation Stages

XY Axis Aluminum Translation Stages

TADC-651

Stage Size 65 × 65 mm

RoHS

TADC-652W

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Others

15 × 15 mm

25 × 25 mm

40 × 40 mm

60 × 60 mm

65 × 65 mm

80 × 80 mm

100 × 100 mm

120 × 120 mm

Others

Aluminum translation stage with high stiffness bearing ways. Cost effective and light weight.

- Unique steel bearing ways with 4-point extended contact yield stable load capacity in all directions.
- Long life, maintenance free.



Attention

- ▶ Micrometer brackets may extend above the top surface of some stages. Check drawings for more information.


Specifications					
Part Number	METRIC	TADC-651C25-M6	ADC-651S25-M6	TADC-652WC25-M6	TADC-652WS25-M6
	INCH	TADC-651C25UU	TADC-651S25UU	TADC-652WC25UU	TADC-652WS25UU
(Opposite Model)	METRIC	—	ADC-651SR25-M6	—	TADC-652WSR25-M6
	INCH	—	TADC-651SR25UU	—	TADC-652WSR25UU
Stage Size [mm]		65×65	65×65	65×65	65×65
Axes of Travel		X axis		XY axis	
Micrometer Position		Center	Side	Center	Side
Travel [mm]		±12.5	±12.5	±12.5	±12.5
Lead of Actuator [mm/rotation]		0.5	0.5	0.5	0.5
Micrometer Readable Resolution [mm]		0.01	0.01	0.01	0.01
Guide Method		Extended contact ball bearing guide			
Primary Material		Aluminum			
Finish		Black anodized			
Load Capacity [N]					
Travel Accuracy	Straightness [μm]	3	3	3	3
	Pitch [N·m]	4.9	4.9	4.9	4.9
Max. Moment Capacity	Roll [N·m]	4.9	4.9	4.9	4.9
	Yaw [N·m]	4.9	4.9	4.9	4.9
Moment Stiffness	Pitch [°/N·cm]	0.3	0.3	0.6	0.6
	Roll [°/N·cm]	0.3	0.3	0.6	0.6
Parallelism [μm]		30	30	50	50
Running Parallelism [μm]		10	10	20	20
Orthogonality [μm]		—	—	10	10
Weight [kg]		0.31	0.31	0.62	0.62



Outline Drawing

TADC-651C25-M6/651C25UU


- Hexagon socket head cap screw (stainless steel construction) M6x8...4 screws (M6)
- Hexagon socket head cap screw (stainless steel construction) 1/4-20UNCx5/16...4 screws (UU)

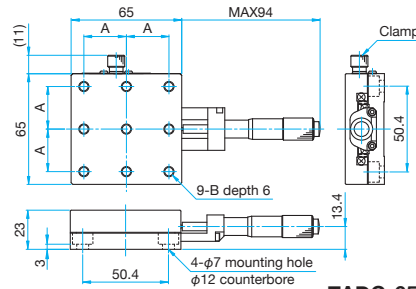

Part Number	A (mm)	B
TADC-651C25-M6	25	M6
TADC-651C25UU	25.4	1/4-20UNC

TADC-651S25-M6/651S25UU


- Hexagon socket head cap screw (stainless steel construction) M6x8...4 screws (M6)
- Hexagon socket head cap screw (stainless steel construction) 1/4-20UNCx5/16...4 screws (UU)

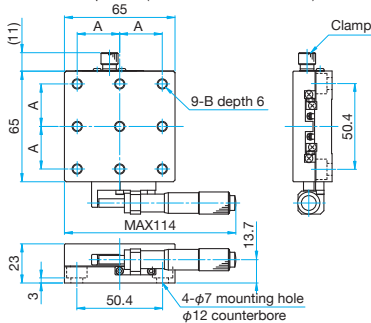

Part Number	A (mm)	B
TADC-651S25-M6	25	M6
TADC-651S25-UU	25.4	1/4-20UNC

TADC-651SR25-M6/651SR25UU


- Hexagon socket head cap screw (stainless steel construction) M6x8...4 screws (M6)
- Hexagon socket head cap screw (stainless steel construction) 1/4-20UNCx5/16...4 screws (UU)

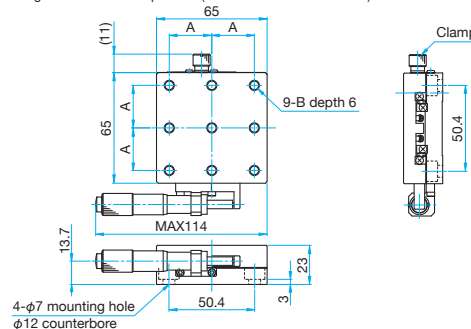

Part Number	A (mm)	B
TADC-651SR25-M6	25	M6
TADC-651SRUU	25.4	1/4-20UNC

TADC-652WC25-M6/652WC25UU


- Hexagon socket head cap screw (stainless steel construction) M6x8...4 screws (M6)
- Hexagon socket head cap screw (stainless steel construction) 1/4-20UNCx5/16...4 screws (UU)

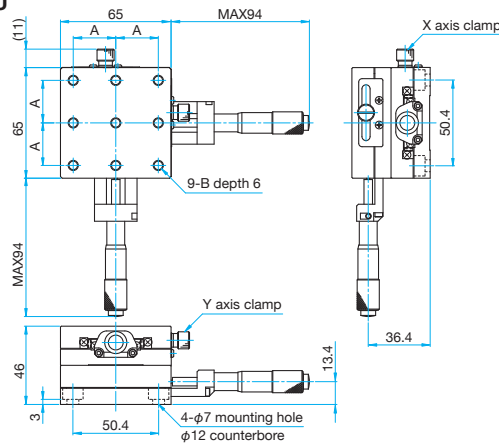

Part Number	A (mm)	B
TADC-652WC25-M6	25	M6
TADC-652WC25UU	25.4	1/4-20UNC

TADC-652WS25-M6/652WS25UU


- Hexagon socket head cap screw (stainless steel construction) M6x8...4 screws (M6)
- Hexagon socket head cap screw (stainless steel construction) 1/4-20UNCx5/16...4 screws (UU)

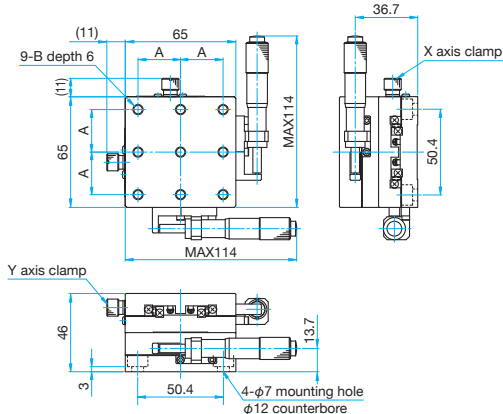

Part Number	A (mm)	B
TADC-652WS25-M6	25	M6
TADC-652WS25-UU	25.4	1/4-20UNC

TADC-652WSR25-M6/652WSR25UU

- Hexagon socket head cap screw (stainless steel construction) M6x8...4 screws (M6)
- Hexagon socket head cap screw (stainless steel construction) 1/4-20UNCx5/16...4 screws (UU)

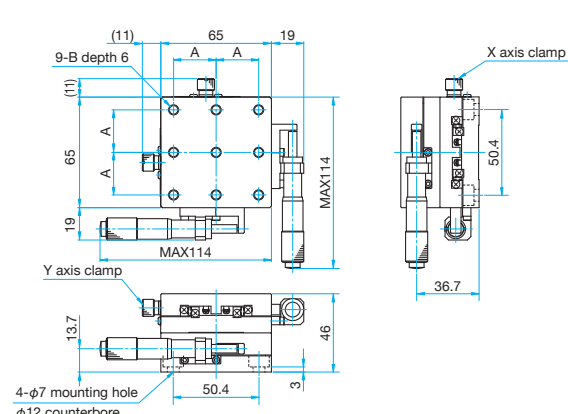

Part Number	A (mm)	B
TADC-652WSR25-M6	25	M6
TADC-652WSR25UU	25.4	1/4-20UNC

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Ohters

15 × 15 mm

25 × 25 mm

40 × 40 mm

60 × 60 mm

65 × 65 mm

80 × 80 mm

100 × 100 mm

120 × 120 mm

Others

Z Axis Aluminium Translation Stages (Vertical Mounting)

Stage Size 25 × 25 mm / 40 × 40 mm / 60 × 60 mm / 65 × 65 mm

TADC-SZ

RoHS

Aluminum translation stage with high stiffness bearing ways. Cost effective and light weight.

- High quality translation stage with smooth travel. Optimal for positioning and alignment.
- Unique steel bearing ways with 4-point extended contact yield stable load capacity in all directions.
- Long life, maintenance free.



Attention


- ▶ Micrometer brackets may extend above the top surface of some stages. Check drawings for more information.



Outline Drawing


TADC-251SZ

Hexagon socket head cap screw (stainless steel construction) M2×4...4 screws

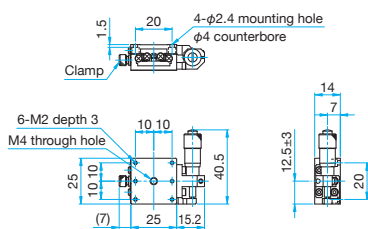

TADC-251SRZ

Hexagon socket head cap screw (stainless steel construction) M2×4...4 screws

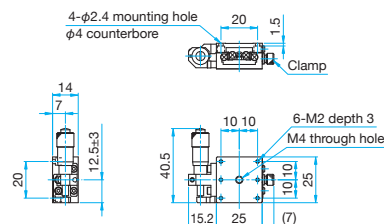

Specifications

Part Number	METRIC	TADC-251SZ	TADC-401SZ	TADC-601SZ	TADC-651SZ25-M6
	INCH	—	—	—	TADC-651SZ25UU
(Opposite Model)	METRIC	TADC-251SRZ	TADC401SRZ	TADC601SRZ	TADC-651SRZ25-M6
	INCH	—	—	—	TADC-651SRZ25UU
Stage Size [mm]		25×25	40×40	60×60	65×65
Axes of Travel		Z axis			
Micrometer Position		Side			
Travel [mm]		±3	±6.5	±6.5	±12.5
Lead of Actuator [mm/rotation]		0.5	0.5	0.5	0.5
Micrometer Readable Resolution [mm]		0.01	0.01	0.01	0.01
Guide Method		Extended contact ball bearing guide			
Primary Material		Aluminum			
Finish		Black anodized			
Load Capacity [N]		14.7N (1.5kgf)	24.5N (2.5kgf)	29.4N (3.0kgf)	39.2N (4.0kgf)
Travel Accuracy	Straightness [μm]	3	3	3	3
Max. Moment Capacity	Pitch [N·m]	1.47	2.5	4.9	4.9
	Roll [N·m]	1.47	2.5	4.9	4.9
Moment Stiffness	Pitch [°/N·cm]	6	0.66	0.4	0.4
	Roll [°/N·cm]	6	0.66	0.4	0.4
Running Parallelism [μm]		20	10	10	10
Weight [kg]		0.05	0.15	0.2	0.31

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Others

15 × 15 mm

25 × 25 mm

40 × 40 mm

60 × 60 mm

65 × 65 mm

80 × 80 mm

100 × 100 mm

120 × 120 mm


Others



Outline Drawing


TADC-401SZ

Hexagonal socket head cap screw M3x6...4 screws
SUS spring washers

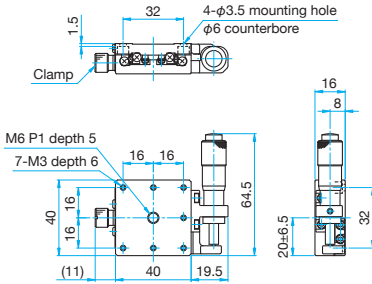


TADC-401SRZ

Hexagonal socket head cap screw M3x6...4 screws
SUS spring washers

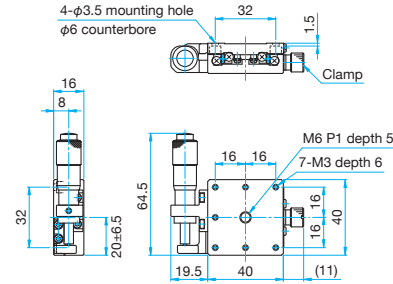


TADC-601SZ

Hexagon socket head cap screw (stainless steel construction) M4x6...4 screws

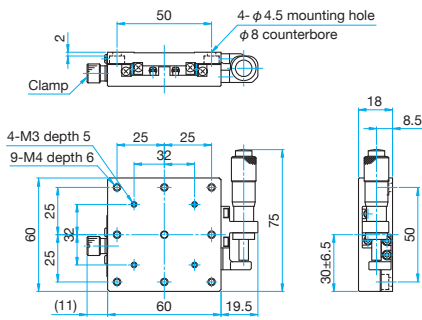


TADC-601SRZ

Hexagon socket head cap screw (stainless steel construction) M4x6...4 screws

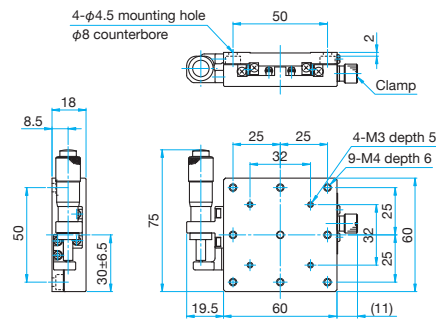

TADC-651SZ25-M6/651SZ25UU


Hexagon socket head cap screw (stainless steel construction) M6x8...4 screws(M6)
Hexagon socket head cap screw (stainless steel construction) 1/4-20UNCx5/16...4 screws (UU)

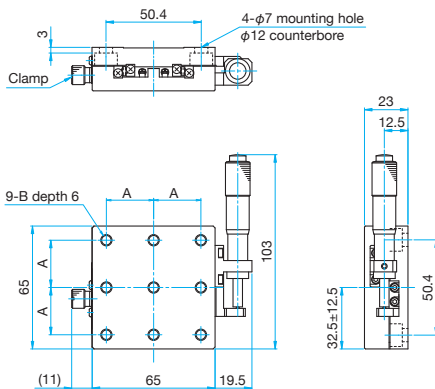

Part Number	A (mm)	B
TADC-651SZ25-M6	25	M6
TADC-651SZ25UU	25.4	1/4-20UNC

TADC-651SRZ25-M6/651SRZ25UU

Hexagon socket head cap screw (stainless steel construction) M6x8...4 screws(M6)
Hexagon socket head cap screw (stainless steel construction) 1/4-20UNCx5/16...4 screws (UU)

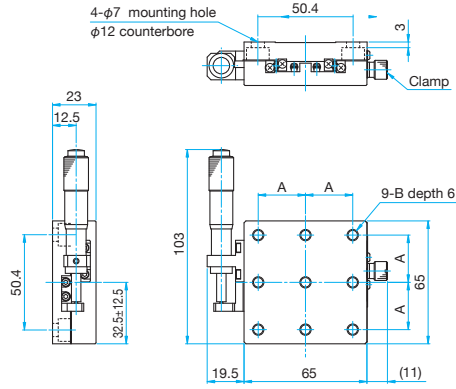

Part Number	A (mm)	B
TADC-651SRZ25-M6	25	M6
TADC-651SRZ25UU	25.4	1/4-20UNC

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Ohters

15 × 15 mm

25 × 25 mm

40 × 40 mm

60 × 60 mm

65 × 65 mm

80 × 80 mm

100 × 100 mm

120 × 120 mm

Others

Z Axis Aluminium Translation Stages (Vertical)


Stage Size 25 × 25 mm / 40 × 40 mm / 60 × 60 mm / 65 × 65 mm

TADC-L

RoHS

Aluminum translation stage with high stiffness bearing ways. Cost effective and light weight.

- High quality translation stage with smooth travel. Optimal for positioning and alignment.
- Unique steel bearing ways with 4-point extended contact yield stable load capacity in all directions.
- Long life, maintenance free.
- Special L brackets are attached to the TADC-SZ series.

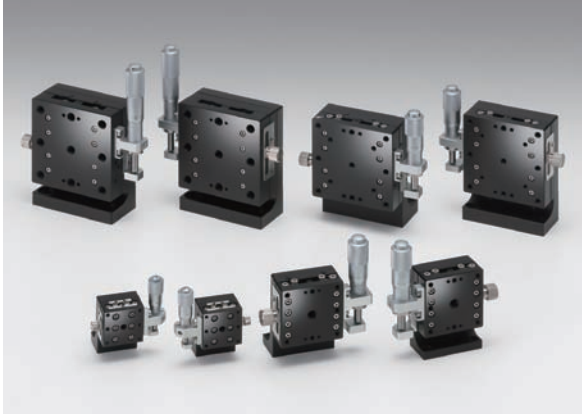

Guide

- ▶ Vertical mounting type stages without a L angle bracket are also available. [Reference](#) E104 [Catalog Code](#) W7514

Attention


- ▶ Micrometer brackets may extend above the top surface of some stages. Check drawings for more information.
- ▶ Note that some samples might not be able to be fixed on the stage depending on their shapes, or required travel might not be ensured.



Outline Drawing


TADC-253L

Hexagon socket head cap screw (stainless steel construction) M2×8...2 screw

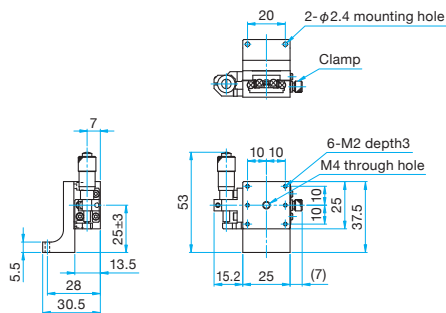

TADC-253RL

Hexagon socket head cap screw (stainless steel construction) M2×8...2 screw

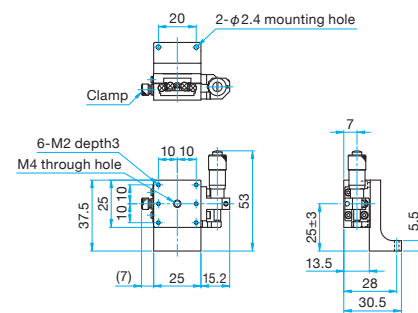

Specifications

Part Number	METRIC	TADC-253L	TADC-403L	TADC-603L	TADC-653L25-M6
	INCH	—	TADC-403LUU	—	TADC-653L25UU
(Opposite Model)	METRIC	TADC-253RL	TADC-403RL	TADC-603RL	TADC-653RL25-M6
	INCH	—	TADC-403RLUU	—	TADC-653RL25UU
Stage Size [mm]		25×25	40×40	60×60	65×65
Axes of Travel		Z axis			
Micrometer Position		Side			
Travel [mm]		±3	±6.5	±6.5	±12.5
Lead of Actuator [mm/rotation]		0.5	0.5	0.5	0.5
Micrometer Readable Resolution [mm]		0.01	0.01	0.01	0.01
Guide Method		Extended contact ball bearing guide			
Primary Material		Aluminum			
Finish		Black anodized			
Load Capacity [N]		14.7N (1.5kgf)	24.5N (2.5kgf)	29.4N (3kgf)	39.2N (4.0kgf)
Travel Accuracy	Straightness [μm]	3	3	3	3
Max. Moment Capacity	Pitch [N·m]	1.47	2.5	4.9	4.9
	Roll [N·m]	1.47	2.5	4.9	4.9
Moment Stiffness	Pitch [°/N·cm]	16.0	0.66	0.3	0.5
	Roll [°/N·cm]	16.0	0.66	0.3	0.5
Running Parallelism [μm]		20	10	10	20
Weight [kg]		0.07	0.2	0.36	0.51

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

Motorized Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Others

15 × 15 mm

25 × 25 mm

40 × 40 mm

60 × 60 mm

65 × 65 mm

80 × 80 mm

100 × 100 mm

120 × 120 mm


Others



Outline Drawing

TADC-403L/403LUU


- Hexagon socket head cap screw (stainless steel construction) M3x8...2 screws
- Hexagon socket head cap screw (stainless steel construction) 6-32UNCx5/16...2 screws (UU)

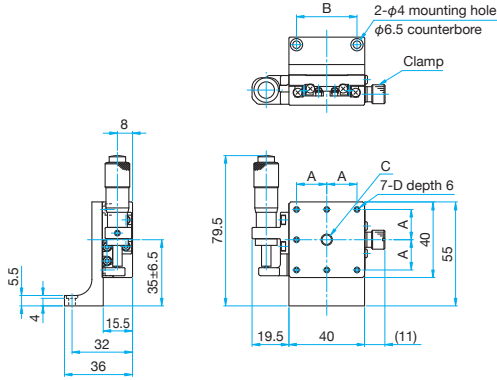

Part Number	A (mm)	B (mm)	C	D
TADC-403L	16	32	M6 P1 depth 5	M3
TADC-403LUU	15.875	31.75	1/4-20UNC depth 5	6-32UNC

TADC-403RL/403RLUU


- Hexagon socket head cap screw (stainless steel construction) M3x8...2 screws
- Hexagon socket head cap screw (stainless steel construction) 6-32UNCx5/16...2 screws (UU)

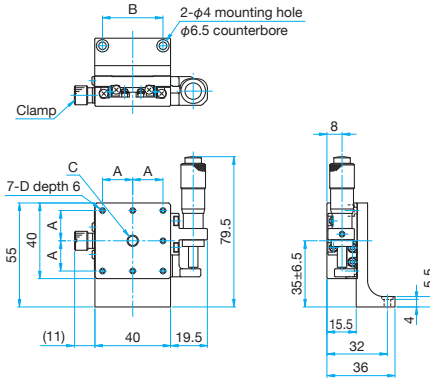

Part Number	A (mm)	B (mm)	C	D
TADC-403RL	16	32	M6 P1 depth 5	M3
TADC-403RLUU	15.875	31.75	1/4-20UNC depth 5	6-32UNC


TADC-603L

- Hexagonal socket head cap screw (stainless steel construction) M3x8...2 screws

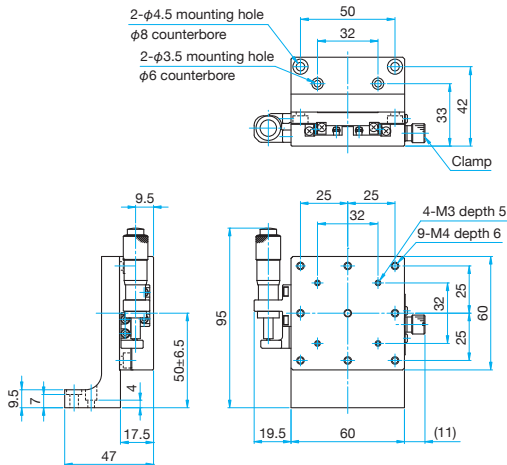


TADC-603RL

- Hexagonal socket head cap screw (stainless steel construction) M3x8...2 screws

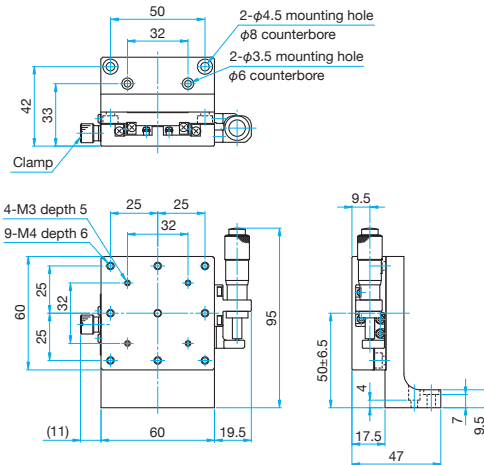

TADC-653L25-M6/653L25UU


- Hexagon socket head cap screw (stainless steel construction) M6x12...2 screws (M6)
- Hexagon socket head cap screw (stainless steel construction) 1/4-20UNCx1/2...2 screws (UU)

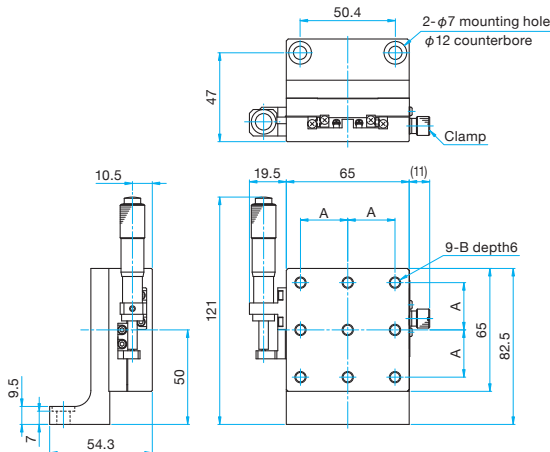

Part Number	A (mm)	B
TADC-653L25-M6	25	M6
TADC-653L25UU	25.4	1/4-20UNC

TADC-653RL25-M6/653RL25UU

- Hexagon socket head cap screw (stainless steel construction) M6x12...2 screws (M6)
- Hexagon socket head cap screw (stainless steel construction) 1/4-20UNCx1/2...2 screws (UU)

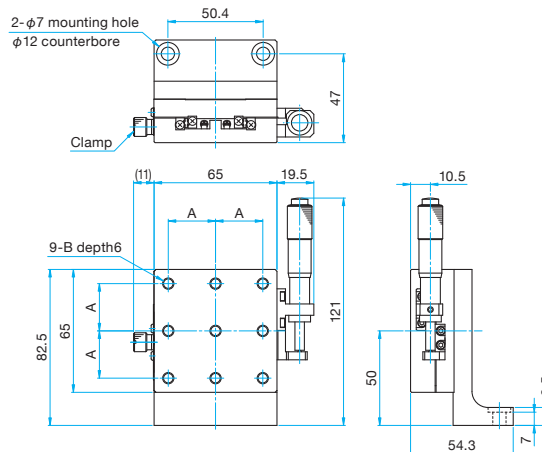

Part Number	A (mm)	B
TADC-653RL25-M6	25	M6
TADC-653RL25UU	25.4	1/4-20UNC

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

X Axis Stages

XY Axis Stages

Z Axis Stages

XZ Axis Stages

XYZ Axis Stages

Rotation Stages

Goniometer

Tilt Stages

Vacuum

Ball Bearing Guide

Crossed Roller

Dovetail

Lapping

V Groove Screw

Ohters

15 x 15 mm

25 x 25 mm

40 x 40 mm

60 x 60 mm

65 x 65 mm

80 x 80 mm

100 x 100 mm

120 x 120 mm

Others